



Brick Handle Lifter

Owner's Manual



WARNING:

Please read carefully and understand these ASSEMBLY AND OPERATION INSTRUCTIONS before operating for the first time. Failure to follow the safety rules and other basic safety precautions may result in serious personal injury and/or affect your warranty.

Model – CL9

SAVE THESE INSTRUCTIONS FOR REFERENCE

Thank you very much for choosing an LES product!

For future reference, please complete the owner's record below:

Model & Serial Number: _____

Purchase Date: _____


Save the receipt, warranty, and this manual. It is important that you read the entire manual to become familiar with this product before you begin using it.

This Brick Handle Lifter has been designed for certain applications only. LES is not responsible for issues arising from modification or improper use of this product such as an application for which it was not designed. We strongly recommend that this product not be modified and/or used for any application other than that for which it was designed.

For technical questions, please call 01384 567 430.

1. Technical Parameters

Parameter	Value
Clamping Range	400 – 680 mm
Material	Galvanized steel
Handles	Ergonomic, non-slip grips
Maximum Load Capacity	50 kg
Additional Feature	Corrosion-resistant finish
Weight	0,5 kg

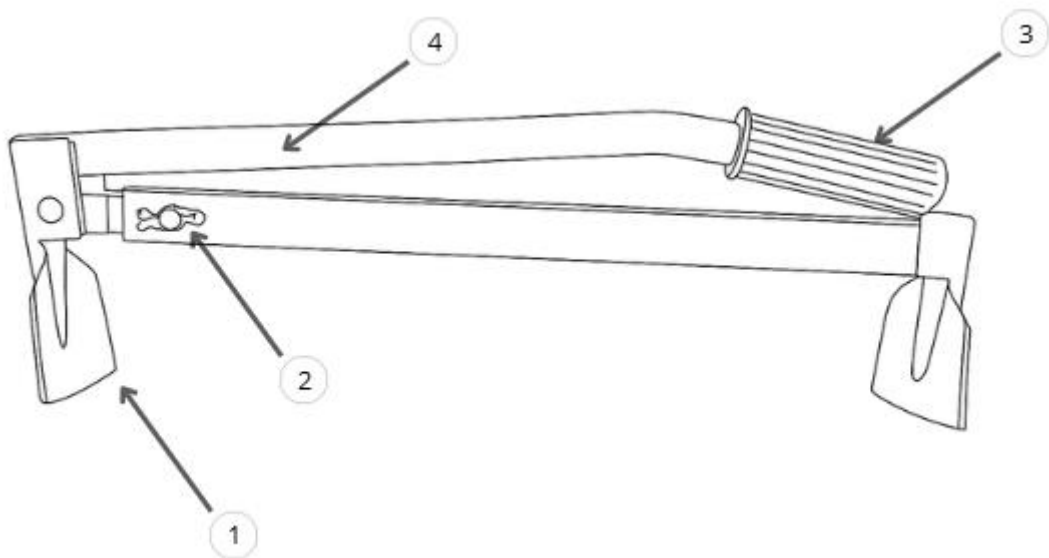

No.	Part Description	Quantity
1	Gripping elements	2 pcs
2	Holes for span adjustment	3 pcs
3	Rubber grip	1 pc
4	Carrying handle	1 pc

2. Safety Instructions

1. Use the Brick Handle Lifter only on firm, flat, and stable surfaces. Do not use it on soft, uneven, or sloped ground.
2. Never exceed the maximum lifting capacity of 50 kg.
3. Before use, always adjust the clamping range (400–680 mm) to properly fit the clinker brick or element to be handled.
4. Ensure the lifter is securely clamped before attempting to lift or move any element.
5. Never place any part of your body under the load during handling or transportation.
6. Visually inspect the tool before each use. If any cracks, deformation, or signs of wear are detected, remove the tool from service immediately.
7. Do not modify the tool or use it in ways inconsistent with its intended purpose.
8. Always grip the lifter by the rubber-coated ergonomic handle. Do not hold it by other parts.
9. Keep a safe working distance from other people when operating the tool.
10. Failure to follow these instructions may result in injury or damage to the tool or materials.
11. All maintenance and repairs must be carried out by qualified personnel only.

3. Use and Operation

1. Adjust the clamping range (400–680 mm) to match the width of the clinker brick to be handled.
2. Position the tool over the brick and tighten it gently until it holds the material securely.
3. Firmly grasp the rubber-coated handle and lift the brick in a slow, controlled motion.
4. Keep your back straight and avoid sudden or twisting movements.
5. Once the brick is placed, carefully release the clamping tension.
6. After use, clean the tool and store it in a dry place protected from moisture and contaminants.

REMEMBER:

- Do not use the tool to lift items outside the recommended clamping range.
- Avoid sudden movements or shocks during lifting.
- Misuse may cause personal injury or material damage.

4. Maintenance

1. Clean the tool after each use, especially around the clamping surfaces and handle area.
2. Store the tool in a dry, protected environment to prevent corrosion and degradation.
3. Visually inspect the tool before every use for any signs of wear, damage, or loosened components.
4. Check that the rubber grip is secure and undamaged; replace it if necessary.
5. When replacing any parts, use only original spare components as specified in the technical documentation.

IMPORTANT:

- Do not use non-original or modified components, as they may compromise the safety and performance of the tool.
- All servicing and repairs must be performed only by qualified personnel.

VERY IMPORTANT:

- Never apply oils, solvents, or chemicals that may damage the galvanized coating or rubber grip.
- Do not use the tool if it is contaminated with corrosive substances or materials that could reduce grip or structural integrity.

5. Warranty

LES ("We" or "Us") warrants to the original purchaser only ("You" or "Your") that the LES product purchased will be free from material defects in both materials and workmanship, normal wear and tear excepted, for a period of one year from date of purchase. The foregoing warranty is valid only if the installation and use of the product is strictly in accordance with product instructions. There are no other warranties, express or implied, including the warranty of merchantability or fitness for a particular purpose. If the product does not comply with this limited warranty, Your sole and exclusive remedy is that We will, at our sole option and within a commercially reasonable time, either replace the product or product component without charge to You or refund the purchase price (less shipping). This limited warranty is not transferable.

Limitations on the Warranty

This limited warranty does not cover: (a) normal wear and tear; (b) damage through abuse, neglect, misuse, or as a result of any accident or in any other manner; (c) damage from misapplication, overloading, or improper installation; (d) improper maintenance and repair; and (e) product alteration in any manner by anyone other than Us, with the sole exception of alterations made pursuant to product instructions and in a workmanlike manner.

NOTE: Do Not send this unit to the factory for service without obtaining a "Returned Goods Authorization Number" from the service department. We will not be responsible for goods returned without proper authorization.

**MACHINERY (SAFETY) REGULATIONS 2005
AND SUCCESSIVE MODIFICATIONS
CONFORMITY DECLARATION**



WE HEREWITH DECLARE

THAT THE FOLLOWING PRODUCT HAS BEEN DESIGNED AND MANUFACTURED
IN ACCORDANCE WITH GOOD ENGINEERING PRACTICE TO ENSURE IT IS SAFE WHEN USED AS INTENDED.
THE PRODUCT COMPLIES WITH THE GENERAL SAFETY REQUIREMENTS OF
THE GENERAL PRODUCT SAFETY REGULATIONS 2005 (UK).

IN CASE OF ALTERATION OF THE PRODUCT, NOT AGREED UPON BY US, THIS
DECLARATION WILL LOSE ITS VALIDITY

MACHINE DESCRIPTION:	Brick Handle Lifter
MACHINE TYPE:	CL9
APPLICABLE EC DIRECTIVES:	MACHINERY (SAFETY) REGULATIONS 2005
APPLICABLE HARMONIZED STANDARDS:	EN ISO 12100:2010
MANUFACTURER:	LIFTING EQUIPMENT STORE

**THE GENERAL PRODUCT SAFETY DIRECTIVE 2001/95/EC
AND SUCCESSIVE MODIFICATIONS
CONFORMITY DECLARATION**



WE HEREWITH DECLARE

THAT THE FOLLOWING PRODUCT HAS BEEN DESIGNED AND MANUFACTURED
IN ACCORDANCE WITH GOOD ENGINEERING PRACTICE TO ENSURE IT IS SAFE WHEN USED AS INTENDED.
THE PRODUCT COMPLIES WITH THE GENERAL SAFETY REQUIREMENTS OF
DIRECTIVE 2001/95/EC ON GENERAL PRODUCT SAFETY.

IN CASE OF ALTERATION OF THE PRODUCT, NOT AGREED UPON BY US, THIS
DECLARATION WILL LOSE ITS VALIDITY.

MACHINE DESCRIPTION:	Brick Handle Lifter
MACHINE TYPE:	CL9
APPLICABLE EC DIRECTIVES:	2001/95/EC – General Product Safety Directive
APPLICABLE HARMONIZED STANDARDS:	EN ISO 12100:2010
MANUFACTURER:	LIFTING EQUIPMENT STORE



Distributed by:

Lifting Equipment Store

Unit 7 & 17C Gainsborough Trading Estate
Rufford Road Stourbridge West Midlands DY9 7ND

www.liftingequipmentstore.com