


## Large Bow Shackle c/w Type A Screw Collar Pin – HTLBSC / HTLBG

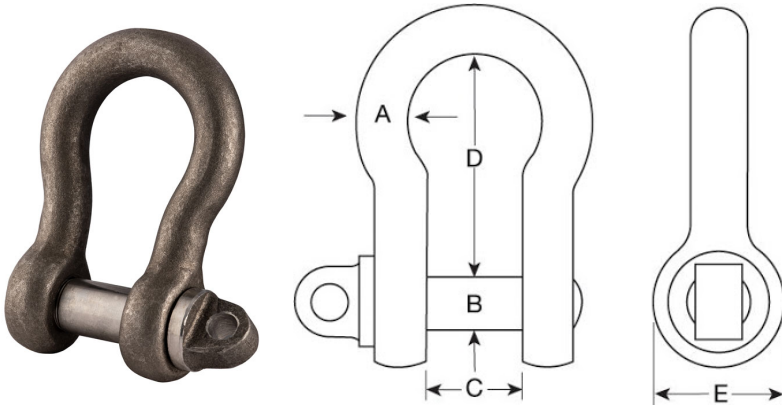

- High tensile steel.
- Self colour and hot dipped galvanised finish.
- Meets the W.L.L. performance requirements of the withdrawn standard BS 3032.
- Minimum breaking load is 4 times the W.L.L.
- Marked with CE, W.L.L, manufacturers ID and traceability code.
- Certs available **2.1** **DoC**

Product Code	Product Code	W.L.L.	A	B	C	D	E	Weight
Self Colour	Galvanised	t	mm	mm	mm	mm	mm	kgs
HTLBSC.15	HTLBG.15	0.15	7.5	10	13	29	19	0.18
HTLBSC.45	HTLBG.45	0.45	10	13	16	41	25	0.18
HTLBSC.75	HTLBG.75	0.75	13	16	22	54	32	0.34
HTLBSC1.25	HTLBG1.25	1.25	16	19	29	70	38	0.65
HTLBSC2	HTLBG2	2	20	22	35	86	44	1.08
HTLBSC2.75	HTLBG2.75	2.75	22	25	41	98	51	1.8

Product Code Self Colour	Product Code Galvanised	W.L.L. t	A mm	B mm	C mm	D mm	E mm	Weight kgs
HTLBSC3.75	HTLBG3.75	3.75	25	28	44	108	57	2.46
HTLBSC4.75	HTLBG4.75	4.75	28	32	51	124	64	3.47
HTLBSC5.75	HTLBG5.75	5.75	32	35	57	137	70	4.56
HTLBSC7.25	HTLBG7.25	7.25	36	38	63	152	76	6.07
HTLBSC8.5	HTLBG8.5	8.5	38	44	70	168	88	8.35
HTLBSC9.5	HTLBG9.5	9.5	41	48	76	187	95	11.81
HTLBSC11.5	HTLBG11.5	11.5	45	51	86	206	102	13.17