


Large Dee Shackle with Type A Screw Collar Pin – HTLD

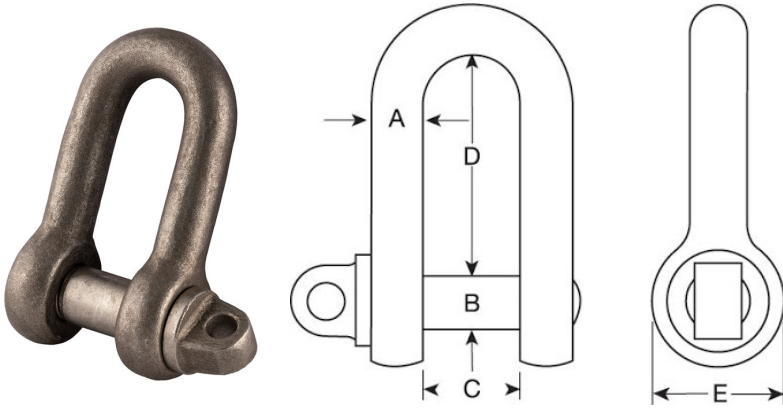

- High tensile steel.
- Self colour and hot dipped galvanised finish.
- Meets the W.L.L. performance requirements of the withdrawn standard BS 3032.
- Minimum breaking load is 4 times the W.L.L.
- Marked with CE, W.L.L, manufacturers ID and traceability code.
- Certs available **2.1** **DoC**

Product Code	Product Code	W.L.L.	A	B	C	D	E	Weight
Self Colour	Galvanised	t	mm	mm	mm	mm	mm	kgs
HTLDSC.25	HTLDG.25	0.25	7.5	10	12	25	19	0.1
HTLDSC.5	HTLDG.5	0.5	10	13	20	37	25	0.12
HTLDSC.75	HTLDG.75	0.75	13	16	28.5	54	32	0.29
HTLDSC1.5	HTLDG1.5	1.5	16	19	32	63	38	0.57
HTLDSC2	HTLDG2	2	20	22	38	73	44	0.92
HTLDSC3	HTLDG3	3	22	25	44	82	51	1.59

Product Code Self Colour	Product Code Galvanised	W.L.L. t	A mm	B mm	C mm	D mm	E mm	Weight kgs
HTLDSC3.75	HTLDG3.75	3.75	25	28	51	95	57	2.12
HTLDSC5	HTLDG5	5	28	32	54	104	64	3.18
HTLDSC6	HTLDG6	6	32	35	60	114	70	4.54
HTLDSC7	HTLDG7	7	36	38	66	127	76	6.06
HTLDSC9.5	HTLDG9.5	9.5	38	44	70	137	88	8.74
HTLDSC11.25	HTLDG11.25	11.25	41	48	76	146	95	11
HTLDSC13	HTLDG13	13	45	51	83	156	102	12.5
HTLDSC14.25	HTLDG14.25	14.25	48	54	92	178	108	15.2