

HA[®] Jaw + Jaw Contact Angular Swivel

HA[®] Jaw + Jaw Contact Angular Swivel

The HA jaw + jaw contact angular swivel is specially designed for lifting applications that involve high rotational speed. The jaw and jaw configuration enables easy connection between other lifting components, such as HA master links or wire rope thimbles.

Standards: designed and manufactured in accordance with ASME B30.26.

Product sizes: available with working load limits from 0.75 tonnes up to 25 tonnes.


Material: manufactured from alloy steel.

Maintenance: built in grease nozzle for easy maintenance and enhanced operational performance.

Temperature: operational temperature range of - 40°C to + 200°C without reduction in working load limit.

Testing: 100% magnaflux crack detected, and 20,000 cycle fatigue rated to 1.5 times working load limit.

Safety factor: 4 : 1.

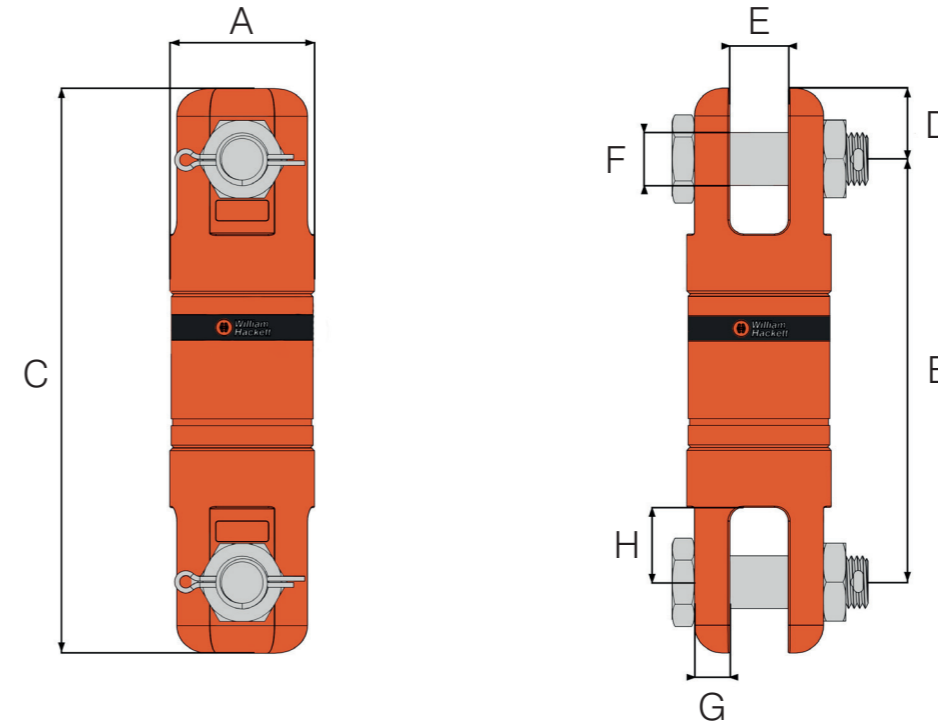

Specifications

Part Code	Wire Rope Dia. mm	WLL t	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Mass kg
8-H31-0075	6	0.75	34	107	133	13	15	10	6	22	0.8
8-H31-015	10	1.50	40	119	159	20	18	13	8	26	1.5
8-H31-03	13	3.00	53	160	210	25	23	19	10	32	2.9
8-H31-05	16	5.00	67	203	267	32	32	22	14	37	5.7
8-H31-085	19	8.50	78	250	326	38	40	30	14	54	8.9
8-H31-10	22	10.00	106	310	410	50	42	38	25	54	26.2
8-H31-15	25	15.00	119	320	440	60	48	38	25	57	31.6
8-H31-25	32	25.00	137	405	535	65	62	50	30	70	50.5

HA® Jaw + Jaw Contact Angular Swivel

HA® Jaw + Jaw Contact Angular Swivel

The HA jaw + jaw contact angular swivel is specially designed for lifting applications that involve high rotational speed. The jaw and jaw configuration enables easy connection between other lifting components, such as HA master links or wire rope thimbles.

Standards: designed and manufactured in accordance with ASME B30.26.

Product sizes: available with working load limits from 0.75 tonnes up to 25 tonnes.


Material: manufactured from alloy steel.

Maintenance: built in grease nozzle for easy maintenance and enhanced operational performance.

Temperature: operational temperature range of - 40°C to + 200°C without reduction in working load limit.

Testing: 100% magnaflux crack detected, and 20,000 cycle fatigue rated to 1.5 times working load limit.

Safety factor: 4 : 1.

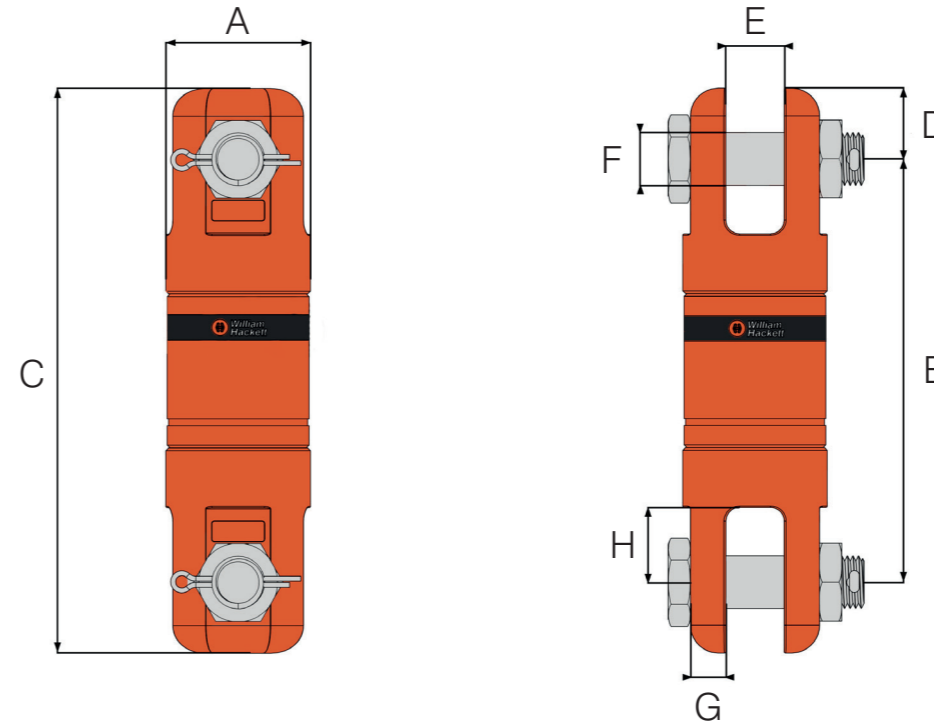

Specifications

Part Code	Wire Rope Dia. inch	WLL t	A inch	B inch	C inch	D inch	E inch	F inch	G inch	H inch	Mass lbs
8-H31-0075	1/4	0.75	1.34	4.21	5.24	0.51	0.59	0.39	0.24	0.87	1.76
8-H31-015	3/8	1.50	1.57	4.69	6.26	0.79	0.71	0.51	0.31	1.02	3.31
8-H31-03	1/2	3.00	2.09	6.30	8.27	0.98	0.91	0.75	0.39	1.26	6.39
8-H31-05	5/8	5.00	2.64	8.00	10.51	1.26	1.26	0.87	0.55	1.46	12.57
8-H31-085	3/4	8.50	3.07	9.84	12.83	1.50	1.57	1.18	0.55	2.13	19.62
8-H31-10	7/8	10.00	4.17	12.20	16.14	1.97	1.65	1.50	0.98	2.13	57.76
8-H31-15	1	15.00	4.69	12.60	17.32	2.36	1.89	1.50	0.98	2.24	69.67
8-H31-25	1-1/4	25.00	5.39	15.94	21.06	2.56	2.44	1.97	1.18	2.76	111.33