






Onyx Grade 80 Swivel Lifting Point with Ring – OXSLP

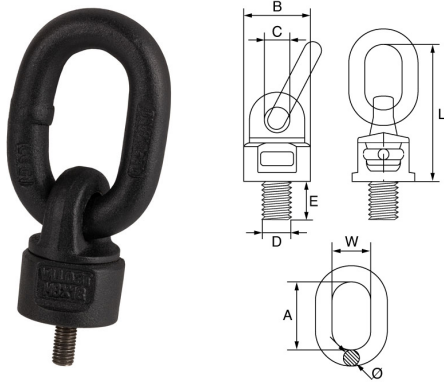

ONYX

- Grade 80 alloy steel, quenched and tempered.
- Matte black painted.
- -20°C up to +200°C.
- M.B.L. equals 4 x W.L.L.
- Marked with ONYX, CE, material grade, size and traceability code.
- Not suitable for rotation under load.
- Certs available **2.1** **DoC**

Product Code	W.L.L 0° t	W.L.L 90° t	D x E mm	A mm	B mm	C mm	L mm	Ø mm	W mm	Torque Nm	Weight kgs	PDF
OXSLP818	0.6	0.3	M8 x 18	55	36	16.5	97	14	30	10-15	0.45	
OXSLP1018	1	0.5	M10 x 18	55	36	16.5	97	14	30	10-15	0.45	

Product Code	W.L.L 0° t	W.L.L 90° t	D x E mm	A mm	B mm	C mm	L mm	Ø mm	W mm	Torque Nm	Weight kgs	PDF
OXSLP1090	1	0.5	M10 x 90	55	36	16.5	97	14	30	10-15	0.5	
OXSLP1218	1	0.5	M12 x 18	55	36	16.5	97	14	30	10-15	0.46	
OXSLP12110	1	0.5	M12 x 110	55	36	16.5	97	14	30	10-15	0.54	
OXSLP1620	2.24	1.12	M16 x 20	55	36	16.5	97	14	30	20-30	0.47	
OXSLP16120	2.24	1.12	M16 x 120	55	36	16.5	97	14	30	20-30	0.63	