


## PSA Anchor Points - type 281 metric thread

- Rotates through 360 adjustable in the direction of the load
- Manufactured from forged alloy steel, quenched and tempered
- Manufactured and tested in accordance with EN795
- Certified by PSA of DGUV
- High fatigue resistance
- Load rated parts are 100% magnaflux crack detected
- Screw secured at ring body
- Individual forged parts and cap screw are traceable to test certification
- Passed 22.2 KN per person load testing
- Passed 150 kg dynamic fall testing (EU standard is 100kg)
- Meets all requirements of the German BG BAU (employer's insurance association of the building industry)
- Meets all requirements of DIN EN795, DIN EN50308, OSHA 1926.502
- Corresponds to the European directive for 'personnel protection equipment' (89/686/EWG)
- Yellow powder coating for high visibility
- PSA - lifting point to be as an anchor point for personal protective equipment

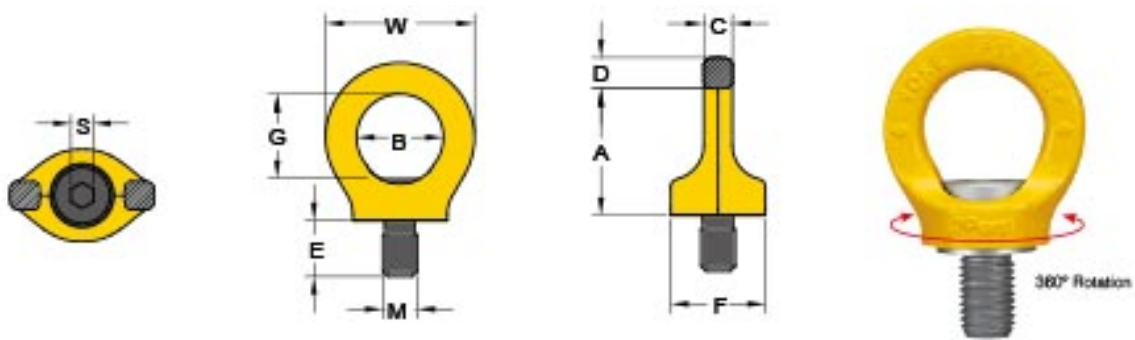

## METRIC 8-281 SPECIFICATION


Part Code	WLL	Thread M	A mm	B mm	C mm	D mm	E mm	F mm	G mm	S mm	W mm	Torque in Nm	Mass Kg
8-281-007	1 Pers	M12x1.75	45	30	10	11	18	33	29	8	52	10	0.2
8-281-015	2 Pers	M16x2.0	48	35	14	13	24	35	31	10	61	30	0.3
8-281-023	2 Pers	M20x2.5	60	40	16	15	30	44	37	12	70	70	0.6

## IMPERIAL 8-281 SPECIFICATION

Part Code	WLL	Thread M	A inch	B inch	C inch	D inch	E inch	F inch	G inch	S inch	W inch	Torque in ft. lbs	Mass Kg
8-281-007	1 Pers	M12x1.75	1.8	1.2	0.4	0.4	0.7	1.3	1.14	0.3	2.0	7.4	0.4
8-281-015	2 Pers	M16x2.00	2.0	1.4	0.5	0.5	0.9	1.4	1.22	0.4	2.4	22.1	0.7
8-281-023	2 Pers	M20x2.50	2.4	1.6	0.6	0.6	1.2	1.7	1.46	0.5	2.8	51.7	1.3

# PSA Anchor Point 8-285

- Rotates through 360 adjustable in the direction of the load
- Manufactured from forged stainless steel
- Manufactured and tested in accordance with EN795
- High fatigue resistance
- Load rated parts are 100% magnaflux crack detected
- Screw secured at ring body
- Individual forged parts and cap screw are traceable to test certification
- Passed 22.2 KN per person load testing
- Passed 150 kg dynamic fall testing (EU standard is 100kg)
- Meets all requirements of the German BG BAU (employer's insurance association of the building industry)
- Meets all requirements of DIN EN795, DIN EN50308, OSHA 1926.502
- Corresponds to the European directive for 'personnel protection equipment' (89/686/EWG)
- Yellow powder coating for high visibility
- Suitable for permanent outdoor application
- PSA-INOX Lifting point to be as an anchor point for personal protective equipment

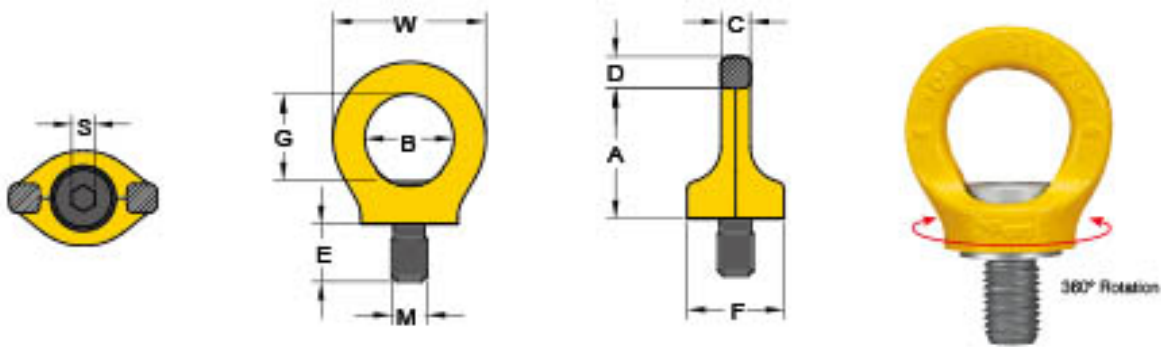

## METRIC 8-285 STAINLESS STEEL SPECIFICATION

Part Code	WLL	Thread M	A mm	B mm	C mm	D mm	E mm	F mm	G mm	S mm	W mm	Torque in Nm	Mass Kg
8-285-007	1 Pers	M12x1.75	45	30	10	11	19	33	29	8	52	10	0.2
8-285-015	2 Pers	M16x2.00	52	35	14	13	24	35	34	10	61	30	0.3
8-285-023	2 Pers	M20x2.50	60	40	16	15	30	44	37	12	70	70	0.6

## IMPERIAL 8-285 STAINLESS STEEL SPECIFICATION

Part Code	WLL	Thread M	A inch	B inch	C inch	D inch	E inch	F inch	G inch	S inch	W inch	Torque in ft. lbs	Mass Kg
8-285-007	1 Pers	M12x1.75	1.8	1.2	0.4	0.4	0.7	1.3	1.14	0.3	2.0	7.4	0.4
8-285-015	2 Pers	M16x2.00	2.0	1.4	0.6	0.5	0.9	1.4	1.34	0.4	2.4	22.1	0.7
8-285-023	2 Pers	M20x2.50	2.4	1.6	0.6	0.6	1.2	1.7	1.46	0.5	2.8	51.7	1.3