

HLA

High-performance linear actuator

Design features



Tr screw



Ball screw (Ku)

- **4 sizes**

with maximum dynamic axial loads from

HLA 10: 12.5 kN

HLA 25: 25 kN

HLA 50: 50 kN

HLA 100: 100 kN

- **Standard stroke lengths:**

HLA 10: 100/200/300/400 mm

HLA 25: 100/200/300/400/500 mm

HLA 50: 200/400/600/800/1000 mm

HLA 100: 300/600/900/1200/1500 mm

- Self-locking trapezoidal screw
- Possible use in multi-screw lifting systems
- Several single drives can be synchronized
- Attachment options for any flange connection capable gear motor
- Optional short safety nut possible
- Low-maintenance from high-quality grease and encapsulated design
- Comprehensive accessories range
- Possible usage according to directive 2014/34/EU (ATEX)



HLA

Selection table

| Selection table HLA | | | | | | | | | | | | | |
|---|------------|------------|-------------|------------|-------------|-------------|------------|-------------|-------------|-------------|-------------|-------------|--|
| Size | 10 | | | 25 | | | 50 | | | 100 | | | |
| Max. tensile/compressive force [kN] | 10 | | | 25 | | | 50 | | | 100 | | | |
| Screw | Tr 24x5 | Ku 25x5 | Ku 25x10 | Tr 30x6 | Ku 32x10 | Ku 32x20 | Tr 50x8 | Ku 40x10 | Ku 40x20 | Tr 80x14 | Ku 63x10 | Ku 63x20 | |
| Ratio N | 5:1 | | | 6:1 | | | 7:1 | | | 8:1 | | | |
| Lift per revolution for ratio N [mm/U] | 1 | 1 | 2 | 1 | 1.67 | 3.33 | 1.14 | 1.43 | 2.86 | 1.75 | 1.25 | 2.5 | |
| Ratio L | 20:1 | | | 24:1 | | | 28:1 | | | 32:1 | | | |
| Lift per revolution for ratio L [mm/U] | 0.25 | 0.25 | 0.5 | 0.25 | 0.42 | 0.83 | 0.29 | 0.36 | 0.71 | 0.44 | 0.31 | 0.63 | |
| Max. drive capacity at 20 °C ambient temperature and 20 % duty cycle/h [kW] | 0.9 | | | 1.5 | | | 2.3 | | | 3.6 | | | |
| Max. drive capacity at 20 °C ambient temperature and 10 % duty cycle/h [kW] | 1.5 | | | 2.6 | | | 4.0 | | | 6.3 | | | |
| Screw torque at max. lifting power [Nm] | 19.4 | 8.7 | 16.7 | 60 | 42 | 82 | 186 | 86 | 165 | 616 | 179 | 338 | |
| Max. permissible torque on the input shaft [Nm] | 29.4 | | | 48.7 | | | 168 | | | 398 | | | |
| Material gearbox housing | ALSi12 | | | GGG50 | | | GGG50 | | | GGG50 | | | |
| Basic weight [kg] | on request | | | 25 | | | 45 | | | 101 | | | |
| Extra weight per 100 mm stroke [kg] | on request | | | 2.2 | | | 4.5 | | | 9.6 | | | |

Selection guide for high-performance linear actuator HLA

- Preselection of the size in relation to the maximum permissible tensile/compressive forces using the selection
- With a compressive load, check screw size by means of the buckling diagram
- Determining the size based on the performance tables with consideration of the lifting capacity and the desired lifting speed and duty cycle



HLA

Performance tables

| Performance table HLA 10 | | | | | | | | | | | | |
|--------------------------|---------------|-------|-----|------|-----|------|-----|------|-----|------|-----|--|
| Tr 24x5 | | | | | | | | | | | | |
| Speed n | Lifting speed | 10 kN | | 8 kN | | 6 kN | | 4 kN | | 2 kN | | |
| | | Nm | kW | Nm | kW | Nm | kW | Nm | kW | Nm | kW | |
| [1/min] | [m/min] | | | | | | | | | | | |
| 3000 | 3 | 5.1 | 1.6 | 4.1 | 1.3 | 3.1 | 1.0 | 2.0 | 0.6 | 1.0 | 0.3 | |
| 1500 | 1.5 | 5.3 | 0.8 | 4.2 | 0.7 | 3.2 | 0.5 | 2.1 | 0.3 | 1.1 | 0.2 | |
| 1000 | 1 | 5.4 | 0.6 | 4.3 | 0.5 | 3.2 | 0.3 | 2.2 | 0.2 | 1.1 | 0.1 | |
| 750 | 0.75 | 5.5 | 0.4 | 4.4 | 0.3 | 3.3 | 0.3 | 2.2 | 0.2 | 1.1 | 0.1 | |
| 500 | 0.5 | 5.6 | 0.3 | 4.5 | 0.2 | 3.4 | 0.2 | 2.2 | 0.1 | 1.1 | 0.1 | |
| 300 | 0.3 | 5.8 | 0.2 | 4.6 | 0.1 | 3.5 | 0.1 | 2.3 | 0.1 | 1.2 | 0.1 | |
| 100 | 0.1 | 6.0 | 0.1 | 4.8 | 0.1 | 3.6 | 0.1 | 2.4 | 0.1 | 1.2 | 0.1 | |
| 3000 | 0.75 | 1.7 | 0.5 | 1.3 | 0.4 | 1.0 | 0.3 | 0.7 | 0.2 | 0.3 | 0.1 | |
| 1500 | 0.38 | 1.8 | 0.3 | 1.4 | 0.2 | 1.1 | 0.2 | 0.7 | 0.1 | 0.4 | 0.1 | |
| 1000 | 0.25 | 1.9 | 0.2 | 1.5 | 0.2 | 1.1 | 0.1 | 0.8 | 0.1 | 0.4 | 0.1 | |
| 750 | 0.19 | 2.0 | 0.2 | 1.6 | 0.1 | 1.2 | 0.1 | 0.8 | 0.1 | 0.4 | 0.1 | |
| 500 | 0.13 | 2.1 | 0.1 | 1.7 | 0.1 | 1.3 | 0.1 | 0.8 | 0.1 | 0.4 | 0.1 | |
| 300 | 0.08 | 2.2 | 0.1 | 1.8 | 0.1 | 1.3 | 0.1 | 0.9 | 0.1 | 0.4 | 0.1 | |
| 100 | 0.03 | 2.4 | 0.1 | 1.9 | 0.1 | 1.4 | 0.1 | 1.0 | 0.1 | 0.5 | 0.1 | |
| Ku 25x5 | | | | | | | | | | | | |
| Speed n | Lifting speed | 10 kN | | 8 kN | | 6 kN | | 4 kN | | 2 kN | | |
| | | Nm | kW | Nm | kW | Nm | kW | Nm | kW | Nm | kW | |
| [1/min] | [m/min] | | | | | | | | | | | |
| 3000 | 3 | 2.3 | 0.7 | 1.8 | 0.6 | 1.4 | 0.4 | 0.9 | 0.3 | 0.5 | 0.1 | |
| 1500 | 1.5 | 2.4 | 0.4 | 1.9 | 0.3 | 1.4 | 0.2 | 0.9 | 0.1 | 0.5 | 0.1 | |
| 1000 | 1 | 2.4 | 0.3 | 1.9 | 0.2 | 1.5 | 0.2 | 1.0 | 0.1 | 0.5 | 0.1 | |
| 750 | 0.75 | 2.5 | 0.2 | 2.0 | 0.2 | 1.5 | 0.1 | 1.0 | 0.1 | 0.5 | 0.1 | |
| 500 | 0.5 | 2.5 | 0.1 | 2.0 | 0.1 | 1.5 | 0.1 | 1.0 | 0.1 | 0.5 | 0.1 | |
| 300 | 0.3 | 2.6 | 0.1 | 2.1 | 0.1 | 1.6 | 0.1 | 1.0 | 0.1 | 0.5 | 0.1 | |
| 100 | 0.1 | 2.7 | 0.1 | 2.1 | 0.1 | 1.6 | 0.1 | 1.1 | 0.1 | 0.5 | 0.1 | |
| 3000 | 0.75 | 0.8 | 0.2 | 0.6 | 0.2 | 0.5 | 0.1 | 0.3 | 0.1 | 0.2 | 0.1 | |
| 1500 | 0.38 | 0.8 | 0.1 | 0.6 | 0.1 | 0.5 | 0.1 | 0.3 | 0.1 | 0.2 | 0.1 | |
| 1000 | 0.25 | 0.9 | 0.1 | 0.7 | 0.1 | 0.5 | 0.1 | 0.3 | 0.1 | 0.2 | 0.1 | |
| 750 | 0.19 | 0.9 | 0.1 | 0.7 | 0.1 | 0.5 | 0.1 | 0.4 | 0.1 | 0.2 | 0.1 | |
| 500 | 0.13 | 0.9 | 0.1 | 0.8 | 0.1 | 0.6 | 0.1 | 0.4 | 0.1 | 0.2 | 0.1 | |
| 300 | 0.08 | 1.0 | 0.1 | 0.8 | 0.1 | 0.6 | 0.1 | 0.4 | 0.1 | 0.2 | 0.1 | |
| 100 | 0.03 | 1.1 | 0.1 | 0.9 | 0.1 | 0.6 | 0.1 | 0.4 | 0.1 | 0.2 | 0.1 | |
| Ku 25x10 | | | | | | | | | | | | |
| Speed n | Lifting speed | 10 kN | | 8 kN | | 6 kN | | 4 kN | | 2 kN | | |
| | | Nm | kW | Nm | kW | Nm | kW | Nm | kW | Nm | kW | |
| [1/min] | [m/min] | | | | | | | | | | | |
| 3000 | 6 | 4.4 | 1.4 | 3.5 | 1.1 | 2.6 | 0.8 | 1.8 | 0.6 | 0.9 | 0.3 | |
| 1500 | 3 | 4.5 | 0.7 | 3.6 | 0.6 | 2.7 | 0.4 | 1.8 | 0.3 | 0.9 | 0.1 | |
| 1000 | 2 | 4.6 | 0.5 | 3.7 | 0.4 | 2.8 | 0.3 | 1.9 | 0.2 | 0.9 | 0.1 | |
| 750 | 1.5 | 4.7 | 0.4 | 3.8 | 0.3 | 2.8 | 0.2 | 1.9 | 0.1 | 0.9 | 0.1 | |
| 500 | 1 | 4.8 | 0.3 | 3.9 | 0.2 | 2.9 | 0.2 | 1.9 | 0.1 | 1.0 | 0.1 | |
| 300 | 0.6 | 4.9 | 0.2 | 4.0 | 0.1 | 3.0 | 0.1 | 2.0 | 0.1 | 1.0 | 0.1 | |
| 100 | 0.2 | 5.1 | 0.1 | 4.1 | 0.1 | 3.1 | 0.1 | 2.1 | 0.1 | 1.0 | 0.1 | |
| 3000 | 1.5 | 1.4 | 0.5 | 1.1 | 0.4 | 0.9 | 0.3 | 0.6 | 0.2 | 0.3 | 0.1 | |
| 1500 | 0.75 | 1.5 | 0.2 | 1.2 | 0.2 | 0.9 | 0.1 | 0.6 | 0.1 | 0.3 | 0.1 | |
| 1000 | 0.5 | 1.6 | 0.2 | 1.3 | 0.1 | 1.0 | 0.1 | 0.7 | 0.1 | 0.3 | 0.1 | |
| 750 | 0.38 | 1.7 | 0.1 | 1.4 | 0.1 | 1.0 | 0.1 | 0.7 | 0.1 | 0.3 | 0.1 | |
| 500 | 0.25 | 1.8 | 0.1 | 1.4 | 0.1 | 1.1 | 0.1 | 0.7 | 0.1 | 0.4 | 0.1 | |
| 300 | 0.15 | 1.9 | 0.1 | 1.5 | 0.1 | 1.1 | 0.1 | 0.8 | 0.1 | 0.4 | 0.1 | |
| 100 | 0.05 | 2.1 | 0.1 | 1.6 | 0.1 | 1.2 | 0.1 | 0.8 | 0.1 | 0.4 | 0.1 | |

| Performance table HLA 25 | | | | | | | | | | | | |
|--------------------------|---------------|-------|-----|-------|-----|-------|-----|-------|-----|------|-----|--|
| Tr 30x6 | | | | | | | | | | | | |
| Speed n | Lifting speed | 25 kN | | 20 kN | | 15 kN | | 10 kN | | 5 kN | | |
| | | Nm | kW | Nm | kW | Nm | kW | Nm | kW | Nm | kW | |
| [1/min] | [m/min] | | | | | | | | | | | |
| 3000 | 3 | 12.8 | 4.0 | 10.3 | 3.2 | 7.7 | 2.4 | 5.1 | 1.6 | 2.6 | 0.8 | |
| 1500 | 1.5 | 13.2 | 2.1 | 10.5 | 1.7 | 7.9 | 1.2 | 5.3 | 0.8 | 2.6 | 0.4 | |
| 1000 | 1 | 13.4 | 1.4 | 10.7 | 1.1 | 8.0 | 0.8 | 5.4 | 0.6 | 2.7 | 0.3 | |
| 750 | 0.75 | 13.7 | 1.1 | 10.9 | 0.9 | 8.2 | 0.6 | 5.5 | 0.4 | 2.7 | 0.2 | |
| 500 | 0.5 | 14.0 | 0.7 | 11.2 | 0.6 | 8.4 | 0.4 | 5.6 | 0.3 | 2.8 | 0.1 | |
| 300 | 0.3 | 14.5 | 0.5 | 11.6 | 0.4 | 8.7 | 0.3 | 5.8 | 0.2 | 2.9 | 0.1 | |
| 100 | 0.1 | 15.3 | 0.2 | 12.2 | 0.1 | 9.2 | 0.1 | 6.1 | 0.1 | 3.1 | 0.1 | |
| 3000 | 0.75 | 4.1 | 1.3 | 3.3 | 1.0 | 2.4 | 0.8 | 1.6 | 0.5 | 0.8 | 0.3 | |
| 1500 | 0.38 | 4.4 | 0.7 | 3.5 | 0.5 | 2.6 | 0.4 | 1.7 | 0.3 | 0.9 | 0.1 | |
| 1000 | 0.25 | 4.6 | 0.5 | 3.7 | 0.4 | 2.8 | 0.3 | 1.8 | 0.2 | 0.9 | 0.1 | |
| 750 | 0.19 | 4.8 | 0.4 | 3.9 | 0.3 | 2.9 | 0.2 | 1.9 | 0.2 | 1.0 | 0.1 | |
| 500 | 0.13 | 5.1 | 0.3 | 4.1 | 0.2 | 3.1 | 0.2 | 2.1 | 0.1 | 1.0 | 0.1 | |
| 300 | 0.08 | 5.5 | 0.2 | 4.4 | 0.1 | 3.3 | 0.1 | 2.2 | 0.1 | 1.1 | 0.1 | |
| 100 | 0.03 | 6.2 | 0.1 | 5.0 | 0.1 | 3.7 | 0.1 | 2.5 | 0.1 | 1.2 | 0.1 | |
| Ku 32x10 | | | | | | | | | | | | |
| Speed n | Lifting speed | 25 kN | | 20 kN | | 15 kN | | 10 kN | | 5 kN | | |
| | | Nm | kW | Nm | kW | Nm | kW | Nm | kW | Nm | kW | |
| [1/min] | [m/min] | | | | | | | | | | | |
| 3000 | 5 | 9.1 | 2.8 | 7.2 | 2.3 | 5.4 | 1.7 | 3.6 | 1.1 | 1.8 | 0.6 | |
| 1500 | 2.5 | 9.3 | 1.5 | 7.4 | 1.2 | 5.6 | 0.9 | 3.7 | 0.6 | 1.9 | 0.3 | |
| 1000 | 1.67 | 9.5 | 1.0 | 7.6 | 0.8 | 5.7 | 0.6 | 3.8 | 0.4 | 1.9 | 0.2 | |
| 750 | 1.25 | 9.7 | 0.8 | 7.7 | 0.6 | 5.8 | 0.5 | 3.9 | 0.3 | 1.9 | 0.2 | |
| 500 | 0.83 | 9.9 | 0.5 | 7.9 | 0.4 | 5.9 | 0.3 | 4.0 | 0.2 | 2.0 | 0.1 | |
| 300 | 0.5 | 10.2 | 0.3 | 8.2 | 0.3 | 6.1 | 0.2 | 4.1 | 0.1 | 2.0 | 0.1 | |
| 100 | 0.17 | 10.8 | 0.1 | 8.6 | 0.1 | 6.5 | 0.1 | 4.3 | 0.1 | 2.2 | 0.1 | |
| 3000 | 1.25 | 2.9 | 0.9 | 2.3 | 0.7 | 1.7 | 0.5 | 1.1 | 0.4 | 0.6 | 0.2 | |
| 1500 | 0.63 | 3.1 | 0.5 | 2.5 | 0.4 | 1.8 | 0.3 | 1.2 | 0.2 | 0.6 | 0.1 | |
| 1000 | 0.42 | 3.3 | 0.3 | 2.6 | 0.3 | 2.0 | 0.2 | 1.3 | 0.1 | 0.7 | 0.1 | |
| 750 | 0.31 | 3.4 | 0.3 | 2.7 | 0.2 | 2.0 | 0.2 | 1.4 | 0.1 | 0.7 | 0.1 | |
| 500 | 0.21 | 3.6 | 0.2 | 2.9 | 0.2 | 2.2 | 0.1 | 1.5 | 0.1 | 0.7 | 0.1 | |
| 300 | 0.13 | 3.9 | 0.1 | 3.1 | 0.1 | 2.3 | 0.1 | 1.6 | 0.1 | 0.8 | 0.1 | |
| 100 | 0.04 | 4.4 | 0.1 | 3.5 | 0.1 | 2.6 | 0.1 | 1.8 | 0.1 | 0.9 | 0.1 | |
| Ku 32x20 | | | | | | | | | | | | |
| Speed n | Lifting speed | 25 kN | | 20 kN | | 15 kN | | 10 kN | | 5 kN | | |
| | | Nm | kW | Nm | kW | Nm | kW | Nm | kW | Nm | kW | |
| [1/min] | [m/min] | | | | | | | | | | | |
| 3000 | 10 | 17.6 | 5.5 | 14.1 | 4.4 | 10.6 | 3.3 | 7.0 | 2.2 | 3.5 | 1.1 | |
| 1500 | 5 | 18.1 | 2.8 | 14.4 | 2.3 | 10.8 | 1.7 | 7.2 | 1.1 | 3.6 | 0.6 | |
| 1000 | 3.33 | 18.4 | 1.9 | 14.7 | 1.5 | 11.0 | 1.2 | 7.4 | 0.8 | 3.7 | 0.4 | |
| 750 | 2.5 | 18.8 | 1.5 | 15.0 | 1.2 | 11.3 | 0.9 | 7.5 | 0.6 | 3.8 | 0.3 | |
| 500 | 1.67 | 19.3 | 1.0 | 15.4 | 0.8 | 11.6 | 0.6 | 7.7 | 0.4 | 3.9 | 0.2 | |
| 300 | 1 | 19.9 | 0.6 | 15.9 | 0.5 | 11.9 | 0.4 | 8.0 | 0.3 | 4.0 | 0.1 | |
| 100 | 0.33 | 21.0 | 0.2 | 16.8 | 0.2 | 12.6 | 0.1 | 8.4 | 0.1 | 4.2 | 0.1 | |
| 3000 | 2.5 | 5.6 | 1.8 | 4.5 | 1.4 | 3.3 | 1.1 | 2.2 | 0.7 | 1.1 | 0.4 | |
| 1500 | 1.25 | 6.0 | 0.9 | 4.8 | 0.8 | 3.6 | 0.6 | 2.4 | 0.4 | 1.2 | 0.2 | |
| 1000 | 0.83 | 6.3 | 0.7 | 5.1 | 0.5 | 3.8 | 0.4 | 2.5 | 0.3 | 1.3 | 0.1 | |
| 750 | 0.63 | 6.6 | 0.5 | 5.3 | 0.4 | 4.0 | 0.3 | 2.6 | 0.2 | 1.3 | 0.1 | |
| 500 | 0.42 | 7.1 | 0.4 | 5.7 | 0.3 | 4.2 | 0.2 | 2.8 | 0.1 | 1.4 | 0.1 | |
| 300 | 0.25 | 7.6 | 0.2 | 6.1 | 0.2 | 4.6 | 0.1 | 3.0 | 0.1 | 1.5 | 0.1 | |
| 100 | 0.08 | 8.5 | 0.1 | 6.8 | 0.1 | 5.1 | 0.1 | 3.4 | 0.1 | 1.7 | 0.1 | |

Drive speed, drive torque and permissible lifting speed with ratio N and L.
 All performance figures related to the dynamic lifting force and a duty cycle at 20% / 1 h or at 30% / 10 min. at 20 °C.

 only static (dynamic not allowed) 10% duty cycle / 1 h and ambient temperature 20 °C

HLA

Performance tables

| Performance table HLA 50 | | | | | | | | | | | | |
|--------------------------|---------------|-------|------|-------|------|-------|------|-------|------|-------|-----|-----|
| Tr 50x8 | | | | | | | | | | | | |
| Speed n | Lifting speed | 50 kN | | 40 kN | | 30 kN | | 20 kN | | 10 kN | | |
| | | Nm | kW | Nm | kW | Nm | kW | Nm | kW | Nm | kW | |
| [1/min] | [m/min] | | | | | | | | | | | |
| Ratio N (7:1) | 3000 | 3.43 | 33.7 | 10.6 | 27.0 | 8.5 | 20.2 | 6.4 | 13.5 | 4.2 | 6.7 | 2.1 |
| | 1500 | 1.71 | 34.6 | 5.4 | 27.7 | 4.3 | 20.7 | 3.3 | 13.8 | 2.2 | 6.9 | 1.1 |
| | 1000 | 1.14 | 35.4 | 3.7 | 28.3 | 3.0 | 21.2 | 2.2 | 14.1 | 1.5 | 7.1 | 0.7 |
| | 750 | 0.86 | 36.0 | 2.8 | 28.8 | 2.3 | 21.6 | 1.7 | 14.4 | 1.1 | 7.2 | 0.6 |
| | 500 | 0.57 | 37.1 | 1.9 | 29.7 | 1.6 | 22.3 | 1.2 | 14.8 | 0.8 | 7.4 | 0.4 |
| | 300 | 0.34 | 38.7 | 1.2 | 30.9 | 1.0 | 23.2 | 0.7 | 15.5 | 0.5 | 7.7 | 0.2 |
| Ratio L (28:1) | 100 | 0.11 | 41.7 | 0.4 | 33.3 | 0.3 | 25.0 | 0.3 | 16.7 | 0.2 | 8.3 | 0.1 |
| | 3000 | 0.86 | 11.0 | 3.5 | 8.8 | 2.8 | 6.6 | 2.1 | 4.4 | 1.4 | 2.2 | 0.7 |
| | 1500 | 0.43 | 11.6 | 1.8 | 9.3 | 1.5 | 6.9 | 1.1 | 4.6 | 0.7 | 2.3 | 0.4 |
| | 1000 | 0.29 | 12.3 | 1.3 | 9.8 | 1.0 | 7.4 | 0.8 | 4.9 | 0.5 | 2.5 | 0.3 |
| | 750 | 0.21 | 12.9 | 1.0 | 10.3 | 0.8 | 7.8 | 0.6 | 5.2 | 0.4 | 2.6 | 0.2 |
| | 500 | 0.14 | 13.9 | 0.7 | 11.1 | 0.6 | 8.4 | 0.4 | 5.6 | 0.3 | 2.8 | 0.1 |
| Ratio L (28:1) | 300 | 0.09 | 15.3 | 0.5 | 12.2 | 0.4 | 9.2 | 0.3 | 6.1 | 0.2 | 3.1 | 0.1 |
| | 100 | 0.03 | 17.8 | 0.2 | 14.2 | 0.1 | 10.7 | 0.1 | 7.1 | 0.1 | 3.6 | 0.1 |

| Ku 40x10 | | | | | | | | | | | | |
|----------------|---------------|-------|------|-------|------|-------|------|-------|-----|-------|-----|-----|
| Speed n | Lifting speed | 50 kN | | 40 kN | | 30 kN | | 20 kN | | 10 kN | | |
| | | Nm | kW | Nm | kW | Nm | kW | Nm | kW | Nm | kW | |
| [1/min] | [m/min] | | | | | | | | | | | |
| Ratio N (7:1) | 3000 | 4.29 | 15.6 | 4.9 | 12.5 | 3.9 | 9.3 | 2.9 | 6.2 | 2.0 | 3.1 | 1.0 |
| | 1500 | 2.14 | 16.0 | 2.5 | 12.8 | 2.0 | 9.6 | 1.5 | 6.4 | 1.0 | 3.2 | 0.5 |
| | 1000 | 1.43 | 16.3 | 1.7 | 13.1 | 1.4 | 9.8 | 1.0 | 6.5 | 0.7 | 3.3 | 0.3 |
| | 750 | 1.07 | 16.6 | 1.3 | 13.3 | 1.0 | 10.0 | 0.8 | 6.6 | 0.5 | 3.3 | 0.3 |
| | 500 | 0.71 | 17.1 | 0.9 | 13.7 | 0.7 | 10.3 | 0.5 | 6.9 | 0.4 | 3.4 | 0.2 |
| | 300 | 0.43 | 17.9 | 0.6 | 14.3 | 0.4 | 10.7 | 0.3 | 7.1 | 0.2 | 3.6 | 0.1 |
| Ratio L (28:1) | 100 | 0.14 | 19.3 | 0.2 | 15.4 | 0.2 | 11.6 | 0.1 | 7.7 | 0.1 | 3.9 | 0.1 |
| | 3000 | 1.07 | 5.1 | 1.6 | 4.1 | 1.3 | 3.1 | 1.0 | 2.0 | 0.6 | 1.0 | 0.3 |
| | 1500 | 0.54 | 5.4 | 0.8 | 4.3 | 0.7 | 3.2 | 0.5 | 2.1 | 0.3 | 1.1 | 0.2 |
| | 1000 | 0.36 | 5.7 | 0.6 | 4.5 | 0.5 | 3.4 | 0.4 | 2.3 | 0.2 | 1.1 | 0.1 |
| | 750 | 0.27 | 6.0 | 0.5 | 4.8 | 0.4 | 3.6 | 0.3 | 2.4 | 0.2 | 1.2 | 0.1 |
| | 500 | 0.18 | 6.4 | 0.3 | 5.1 | 0.3 | 3.9 | 0.2 | 2.6 | 0.1 | 1.3 | 0.1 |
| Ratio L (28:1) | 300 | 0.11 | 7.1 | 0.2 | 5.6 | 0.2 | 4.2 | 0.1 | 2.8 | 0.1 | 1.4 | 0.1 |
| | 100 | 0.04 | 8.2 | 0.1 | 6.6 | 0.1 | 4.9 | 0.1 | 3.3 | 0.1 | 1.6 | 0.1 |

| Ku 40x20 | | | | | | | | | | | | |
|----------------|---------------|-------|------|-------|------|-------|------|-------|------|-------|-----|-----|
| Speed n | Lifting speed | 50 kN | | 40 kN | | 30 kN | | 20 kN | | 10 kN | | |
| | | Nm | kW | Nm | kW | Nm | kW | Nm | kW | Nm | kW | |
| [1/min] | [m/min] | | | | | | | | | | | |
| Ratio N (7:1) | 3000 | 8.57 | 30.0 | 9.4 | 24.0 | 7.6 | 18.0 | 5.7 | 12.0 | 3.8 | 6.0 | 1.9 |
| | 1500 | 4.29 | 30.8 | 4.8 | 24.7 | 3.9 | 18.5 | 2.9 | 12.3 | 1.9 | 6.2 | 1.0 |
| | 1000 | 2.86 | 31.5 | 3.3 | 25.2 | 2.6 | 18.9 | 2.0 | 12.6 | 1.3 | 6.3 | 0.7 |
| | 750 | 2.14 | 32.1 | 2.5 | 25.7 | 2.0 | 19.2 | 1.5 | 12.8 | 1.0 | 6.4 | 0.5 |
| | 500 | 1.43 | 33.1 | 1.7 | 26.5 | 1.4 | 19.8 | 1.0 | 13.2 | 0.7 | 6.6 | 0.3 |
| | 300 | 0.86 | 34.5 | 1.1 | 27.6 | 0.9 | 20.7 | 0.6 | 13.8 | 0.4 | 6.9 | 0.2 |
| Ratio L (28:1) | 100 | 0.29 | 37.1 | 0.4 | 29.7 | 0.3 | 22.3 | 0.2 | 14.9 | 0.2 | 7.4 | 0.1 |
| | 3000 | 2.14 | 9.8 | 3.1 | 7.9 | 2.5 | 5.9 | 1.9 | 3.9 | 1.2 | 2.0 | 0.6 |
| | 1500 | 1.07 | 10.3 | 1.6 | 8.3 | 1.3 | 6.2 | 1.0 | 4.1 | 0.6 | 2.1 | 0.3 |
| | 1000 | 0.71 | 10.9 | 1.1 | 8.8 | 0.9 | 6.6 | 0.7 | 4.4 | 0.5 | 2.2 | 0.2 |
| | 750 | 0.54 | 11.5 | 0.9 | 9.2 | 0.7 | 6.9 | 0.5 | 4.6 | 0.4 | 2.3 | 0.2 |
| | 500 | 0.36 | 12.4 | 0.6 | 9.9 | 0.5 | 7.4 | 0.4 | 5.0 | 0.3 | 2.5 | 0.1 |
| Ratio L (28:1) | 300 | 0.21 | 13.6 | 0.4 | 10.9 | 0.3 | 8.2 | 0.3 | 5.4 | 0.2 | 2.7 | 0.1 |
| | 100 | 0.07 | 15.9 | 0.2 | 12.7 | 0.1 | 9.5 | 0.1 | 6.3 | 0.1 | 3.2 | 0.1 |

| Performance table HLA 100 | | | | | | | | | | | | |
|---------------------------|---------------|--------|-------|-------|------|-------|------|-------|------|-------|------|-----|
| Tr 80x14 | | | | | | | | | | | | |
| Speed n | Lifting speed | 100 kN | | 80 kN | | 60 kN | | 40 kN | | 20 kN | | |
| | | Nm | kW | Nm | kW | Nm | kW | Nm | kW | Nm | kW | |
| [1/min] | [m/min] | | | | | | | | | | | |
| Ratio N (8:1) | 3000 | 5.25 | 95.9 | 30.1 | 76.7 | 24.1 | 57.5 | 18.1 | 38.4 | 12.1 | 19.2 | 6.0 |
| | 1500 | 2.63 | 97.8 | 15.4 | 78.2 | 12.3 | 58.7 | 9.2 | 39.1 | 6.1 | 19.6 | 3.1 |
| | 1000 | 1.75 | 99.9 | 10.5 | 79.9 | 8.4 | 59.9 | 6.3 | 39.9 | 4.2 | 20.0 | 2.1 |
| | 750 | 1.31 | 101.6 | 8.0 | 81.3 | 6.4 | 61.0 | 4.8 | 40.7 | 3.2 | 20.3 | 1.6 |
| | 500 | 0.88 | 104.8 | 5.5 | 83.8 | 4.4 | 62.9 | 3.3 | 41.9 | 2.2 | 21.0 | 1.1 |
| | 300 | 0.53 | 109.5 | 3.4 | 87.6 | 2.8 | 65.7 | 2.1 | 43.8 | 1.4 | 21.9 | 0.7 |
| Ratio L (8:1) | 100 | 0.18 | 120.1 | 1.3 | 96.1 | 1.0 | 72.0 | 0.8 | 48.0 | 0.5 | 24.0 | 0.3 |
| | 3000 | 1.31 | 30.5 | 9.6 | 24.4 | 7.7 | 18.3 | 5.8 | 12.2 | 3.8 | 6.1 | 1.9 |
| | 1500 | 0.66 | 32.3 | 5.1 | 25.8 | 4.1 | 19.4 | 3.0 | 12.9 | 2.0 | 6.5 | 1.0 |
| | 1000 | 0.44 | 34.1 | 3.6 | 27.3 | 2.9 | 20.5 | 2.1 | 13.7 | 1.4 | 6.8 | 0.7 |
| | 750 | 0.33 | 35.7 | 2.8 | 28.5 | 2.2 | 21.4 | 1.7 | 14.3 | 1.1 | 7.1 | 0.6 |
| | 500 | 0.22 | 38.7 | 2.0 | 30.9 | 1.6 | 23.2 | 1.2 | 15.5 | 0.8 | 7.7 | 0.4 |
| Ratio L (8:1) | 300 | 0.13 | 43.0 | 1.4 | 34.4 | 1.1 | 25.8 | 0.8 | 17.2 | 0.5 | 8.6 | 0.3 |
| | 100 | 0.04 | 52.2 | 0.5 | 41.8 | 0.4 | 31.3 | 0.3 | 20.9 | 0.2 | 10.4 | 0.1 |

| Ku 63x10 | | | | | | | | | | | | |
|---------------|---------------|--------|------|-------|------|-------|------|-------|------|-------|-----|-----|
| Speed n | Lifting speed | 100 kN | | 80 kN | | 60 kN | | 40 kN | | 20 kN | | |
| | | Nm | kW | Nm | kW | Nm | kW | Nm | kW | Nm | kW | |
| [1/min] | [m/min] | | | | | | | | | | | |
| Ratio N (8:1) | 3000 | 3.75 | 28.0 | 8.8 | 22.4 | 7.0 | 16.8 | 5.3 | 11.2 | 3.5 | 5.6 | 1.8 |
| | 1500 | 1.88 | 28.6 | 4.5 | 22.9 | 3.6 | 17.1 | 2.7 | 11.4 | 1.8 | 5.7 | 0.9 |
| | 1000 | 1.25 | 29.2 | 3.1 | 23.4 | 2.4 | 17.5 | 1.8 | 11.7 | 1.2 | 5.8 | 0.6 |
| | 750 | 0.94 | 29.7 | 2.3 | 23.8 | 1.9 | 17.8 | 1.4 | 11.9 | 0.9 | 5.9 | 0.5 |
| | 500 | 0.63 | 30.6 | 1.6 | 24.5 | 1.3 | 18.4 | 1.0 | 12.3 | 0.6 | 6.1 | 0.3 |
| | 300 | 0.38 | 32.0 | 1.0 | 25.6 | 0.8 | 19.2 | 0.6 | 12.8 | 0.4 | 6.4 | 0.2 |
| Ratio L (8:1) | 100 | 0.13 | 35.1 | 0.4 | 28.1 | 0.3 | 21.1 | 0.2 | 14.0 | 0.1 | 7.0 | 0.1 |
| | 3000 | 0.94 | 8.9 | 2.8 | 7.1 | 2.2 | 5.4 | 1.7 | 3.6 | 1.1 | 1.8 | 0.6 |
| | 1500 | 0.47 | 9.4 | 1.5 | 7.6 | 1.2 | 5.7 | 0.9 | 3.8 | 0.6 | 1.9 | 0.3 |
| | 1000 | 0.31 | 10.0 | 1.0 | 8.0 | 0.8 | 6.0 | 0.6 | 4.0 | 0.4 | 2.0 | 0.2 |
| | 750 | 0.23 | 10.4 | 0.8 | 8.3 | 0.7 | 6.3 | 0.5 | 4.2 | 0.3 | 2.1 | 0.2 |
| | 500 | 0.16 | 11.3 | 0.6 | 9.0 | 0.5 | 6.8 | 0.4 | 4.5 | 0.2 | 2.3 | 0.1 |
| Ratio L (8:1) | 300 | 0.09 | 12.6 | 0.4 | 10.1 | 0.3 | 7.5 | 0.2 | 5.0 | 0.2 | 2.5 | 0.1 |
| | 100 | 0.03 | 15.3 | 0.2 | 12.2 | 0.1 | 9.2 | 0.1 | 6.1 | 0.1 | 3.1 | 0.1 |

| Ku 63x20 | | | | | | | | | | | | |
|---------------|---------------|--------|------|-------|------|-------|------|-------|------|-------|------|-----|
| Speed n | Lifting speed | 100 kN | | 80 kN | | 60 kN | | 40 kN | | 20 kN | | |
| | | Nm | kW | Nm | kW | Nm | kW | Nm | kW | Nm | kW | |
| [1/min] | [m/min] | | | | | | | | | | | |
| Ratio N (8:1) | 3000 | 7.5 | 53.0 | 16.7 | 42.4 | 13.3 | 31.8 | 10.0 | 21.2 | 6.7 | 10.6 | 3.3 |
| | 1500 | 3.75 | 54.1 | 8.5 | 43.3 | 6.8 | 32.4 | 5.1 | 21.6 | 3.4 | 10.8 | 1.7 |
| | 1000 | 2.5 | 55.2 | 5.8 | 44.2 | 4.6 | 33.1 | 3.5 | 22.1 | 2.3 | 11.0 | 1.2 |
| | 750 | 1.88 | 56.2 | 4.4 | 45.0 | 3.5 | 33.7 | 2.6 | 22.5 | 1.8 | 11.2 | 0.9 |
| | 500 | 1.25 | 58.0 | 3.0 | 46.4 | 2.4 | 34.8 | 1.8 | 23.2 | 1.2 | 11.6 | 0.6 |
| | 300 | 0.75 | 60.6 | 1.9 | 48.5 | 1.5 | 36.3 | 1.1 | 24.2 | 0.8 | 12.1 | 0.4 |
| Ratio L (8:1) | 100 | 0.25 | 66.4 | 0.7 | 53.1 | 0.6 | 39.8 | 0.4 | 26.6 | 0.3 | 13.3 | 0.1 |
| | 3000 | 1.88 | 16.9 | 5.3 | 13.5 | 4.2 | 10.1 | 3.2 | 6.8 | 2.1 | 3.4 | 1.1 |
| | 1500 | 0.94 | 17.9 | 2.8 | 14.3 | 2.2 | 10.7 | 1.7 | 7.1 | 1.1 | 3.6 | 0.6 |
| | 1000 | 0.63 | 18.9 | 2.0 | 15.1 | 1.6 | 11.3 | 1.2 | 7.5 | 0.8 | 3.8 | 0.4 |
| | 750 | 0.47 | 19.7 | 1.5 | 15.8 | 1.2 | 11.8 | 0.9 | 7.9 | 0.6 | 3.9 | 0.3 |
| | 500 | 0.31 | 21.4 | 1.1 | 17.1 | 0.9 | 12.8 | 0.7 | 8.6 | 0.4 | 4.3 | 0.2 |
| Ratio L (8:1) | 300 | 0.19 | 23.8 | 0.7 | 19.0 | 0.6 | 14.3 | 0.4 | 9.5 | 0.3 | 4.8 | 0.1 |
| | 100 | 0.06 | 28.9 | 0.3 | 23.1 | 0.2 | 17.3 | 0.2 | 11.5 | 0.1 | 5.8 | 0.1 |

Drive speed, drive torque and permissible lifting speed with ratio N and L.
 All performance figures related to the dynamic lifting force and a duty cycle at 20 % / 1 h or at 30 % / 10 min. at 20 °C.


only static (dynamic not allowed)

10 % duty cycle / 1 h and ambient temperature 20 °C


HLA

Technical drawings


Technical drawings

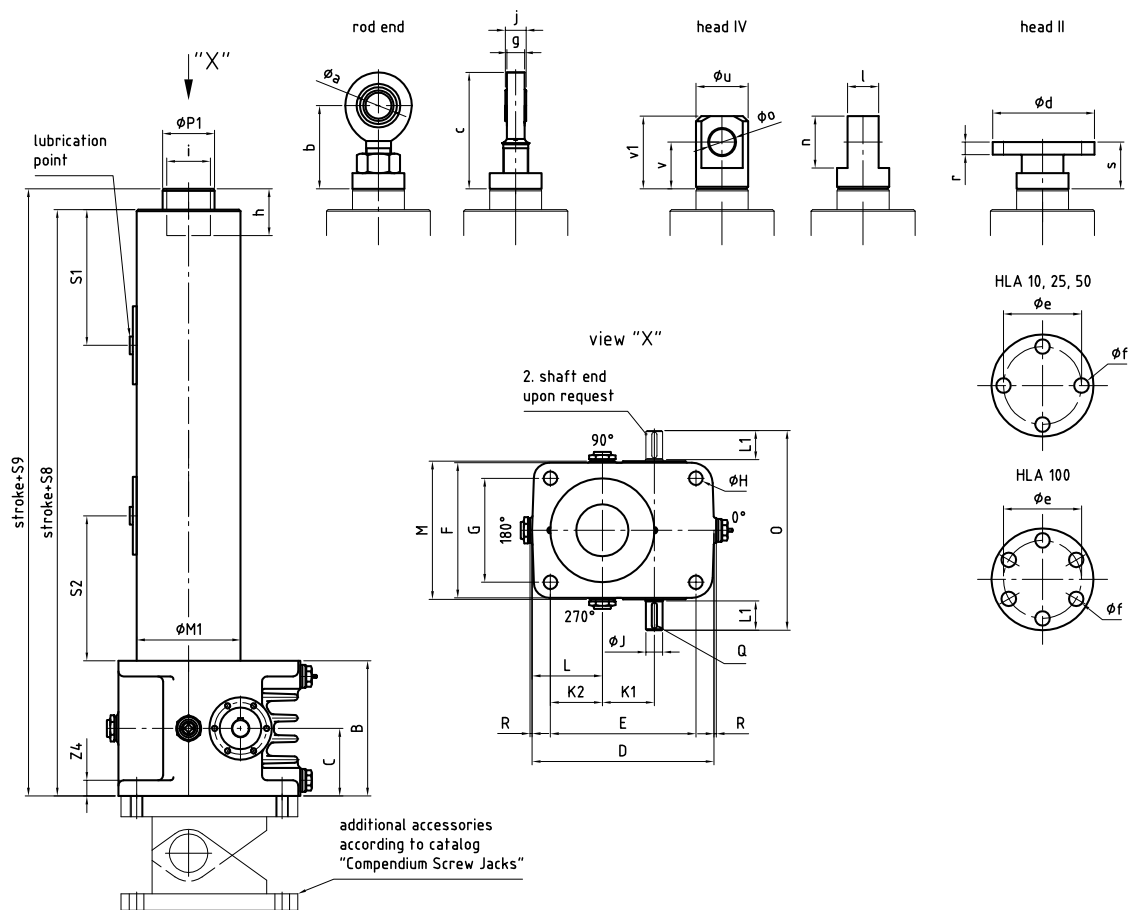


wear control
(in combination with safety nut only)

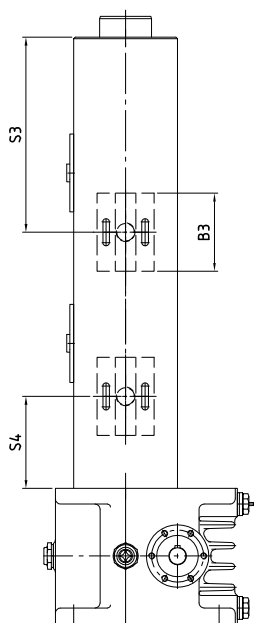

inductive limit switch M12x1
option Vi

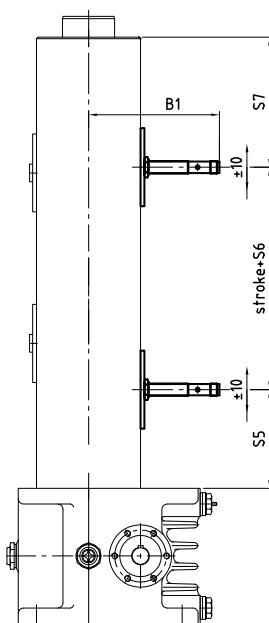

mechanical limit switch M12x1
option Vm

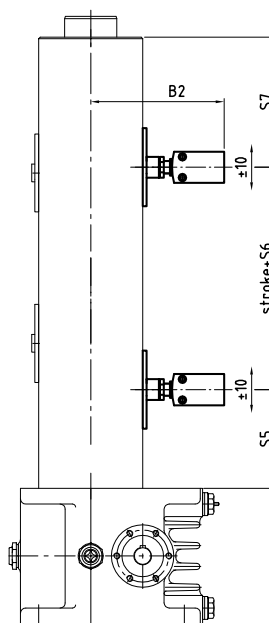

CAD & go



HLA


Dimensions

| Dimensions HLA | | | | |
|--|-------------------|---------------|---------------|---------------------|
| Size | HLA 10 | HLA 25 | HLA 50 | HLA 100 |
| Dimensions [mm] | | | | |
| B | 105 | 130 | 160 | 200 |
| C | 52.5 | 65 | 80 | 100 |
| D | 138 | 175 | 235 | 275 |
| E | 110 | 140 | 190 | 220 |
| F | 105 | 130 | 160 | 200 |
| G | 80 | 100 | 120 | 150 |
| Ø H | 9 | 13 | 17 | 21 |
| h | 20 | 45 | 63 | 54 |
| i | M 33 x 2 | M 42 x 2 | M 60 x 2 | M 95 x 3 |
| Ø J k6 | 14 | 16 | 24 | 32 |
| K 1 | 36 | 50 | 63 | 80 |
| K 2 | 40 | 50 | 70 | 75 |
| L | 54 | 67.5 | 92.5 | 102.5 |
| L 1 | 18 | 28 | 36 | 58 |
| M | 100 | 133 | 163 | 204 |
| Ø M 1 | 70 | 100 | 130 | 170 |
| O | 140 | 192 | 238 | 322 |
| Ø P 1 | 40 | 50 | 70 | 110 |
| Q - DIN 6885 A | 5 x 5 x 16 | 5 x 5 x 25 | 8 x 7 x 32 | 10 x 8 x 50 |
| R | 2 | 2 | 2 | 2 |
| S 1 (Lubrication) | 100 | 130.5 | 161.5 | 206 |
| S 2 (Lubrication) | 125 | 139.5 | 158.5 | 274 |
| S 8 | 330 | 400 | 480 | 680 |
| S 9 | 350 | 420 | 500 | 700 |
| Z 4 | 12 | 15 | 20 | 25 |
| Rod end | | | | |
| Ø a H7 | 17 | 25 | 35 | 60 |
| b | 60 | 80 | 125 | 160 |
| c | 83 | 112 | 166 | 227.5 |
| g | 10.6 | 17 | 21 | 38 |
| j | 14 | 20 | 25 | 44 |
| Head type IV | | | | |
| l-0.2 | 25 | 30 | 40 | 75 |
| n | 40 | 50 | 70 | 120 |
| Ø o H7 | 20 | 25 | 35 | 60 |
| Ø u | 40 | 50 | 65 | 110 |
| v | 40 | 45 | 65 | 90 |
| v 1 | 60 | 70 | 100 | 150 |
| Head type II | | | | |
| Ø d / Ø e / Ø f | 72 / 50 / 9 | 98 / 75 / 14 | 122 / 85 / 17 | 182 / 135 / 26 |
| r / s | 10 / 37 | 12 / 45 | 18 / 65 | 25 / 62 |
| Wear control | | | | |
| B 3 | 75 | 75 | 75 | 75 |
| S 3 / S 4 | 142 / 83 | 187.5 / 88.5 | 232.5 / 87 | 322.5 / 157.5 |
| Limit switch inductive/mechanical | | | | |
| B 1 ± 1.5 | 111 | 126 | 138.5 | 156 |
| B 2 ± 1.5 | 112 | 128 | 141 | 158.5 |
| S 5 / S 6 / S 7 | 87.5 / 25 / 112.5 | 95 / 50 / 125 | 92 / 70 / 158 | 162.5 / 165 / 152.5 |




HLA Diagrams

Critical screw speed HLA

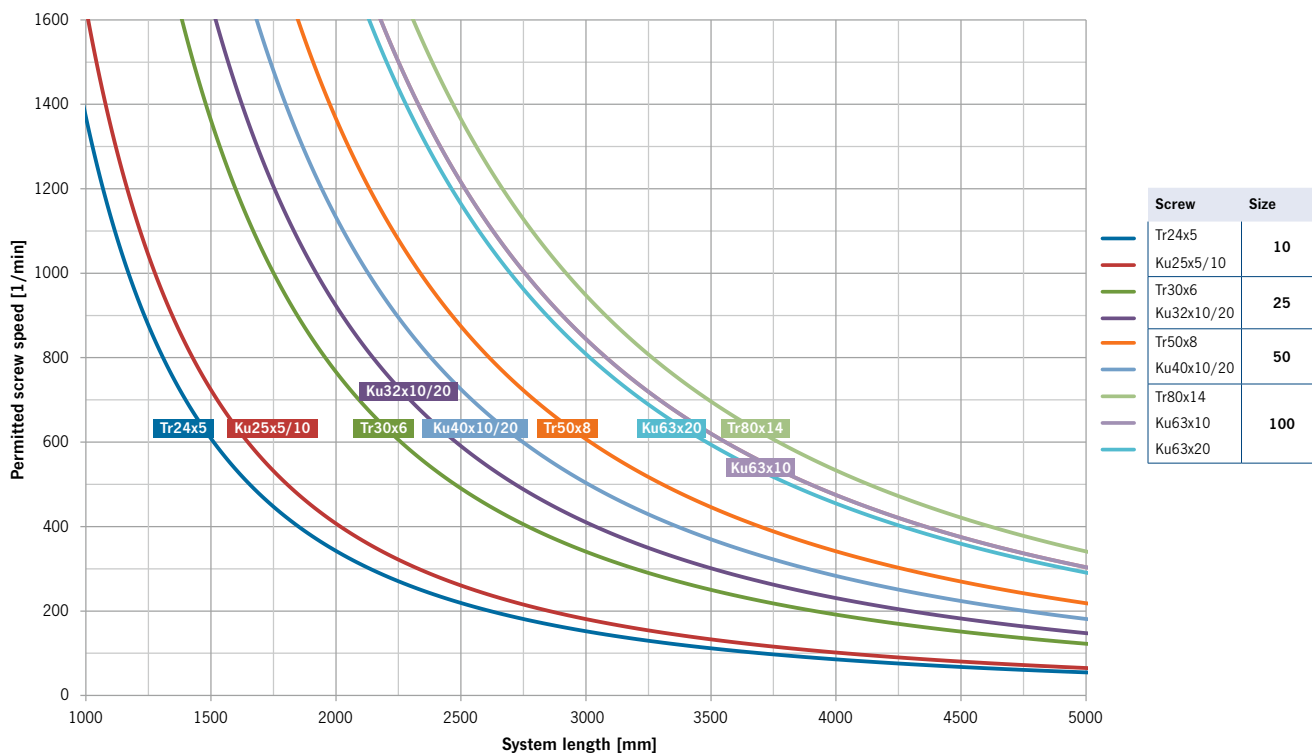

Buckling HLA

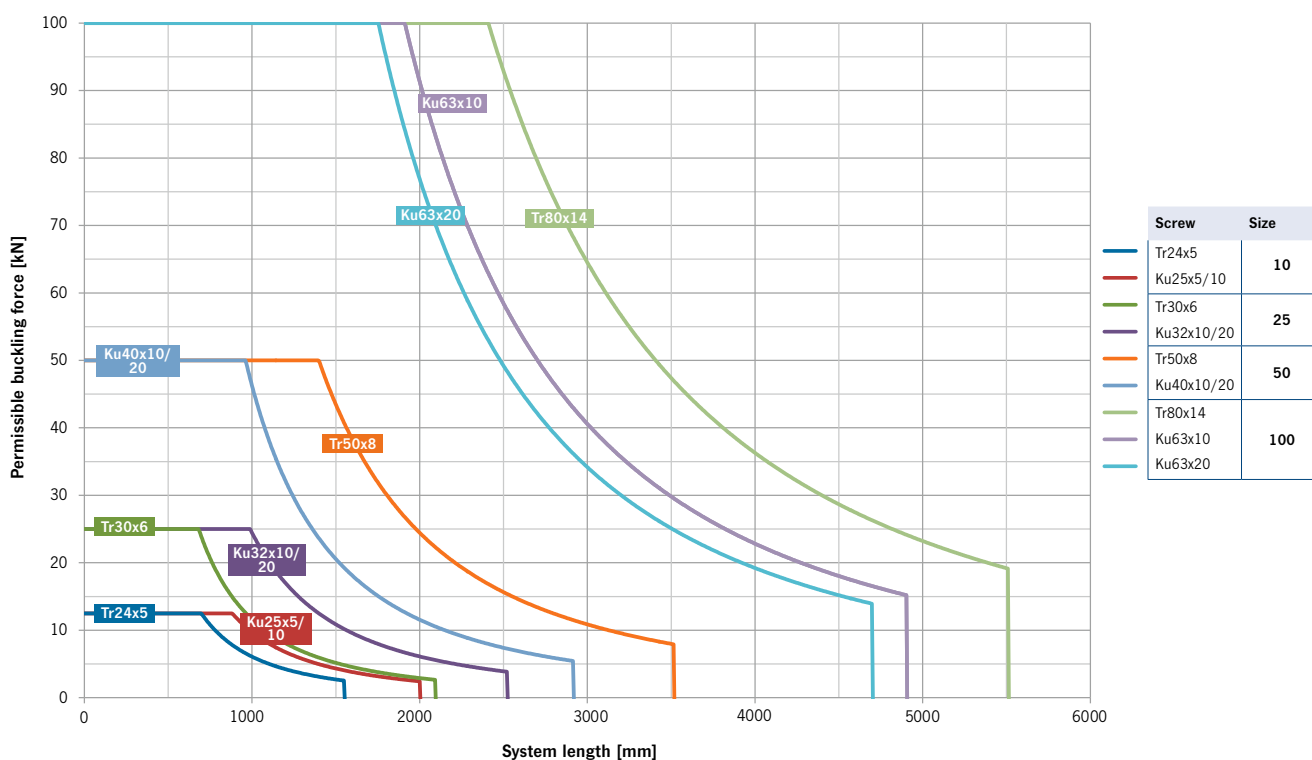

HLA

Order code



| No. | Explanation | |
|-----|----------------------|---|
| 1 | Series | HLA |
| 2 | Size | 10 / 25 / 50 / 100 |
| 3 | Mounting position | M1A / M1B / M2A / M2B / M3B / M4A M4B / M3A / M5A / M5B / M6A / M6B |
| 4 | Screw | Tr = Trapezoidal screw Ku = Ball screw (Ku) |
| 5 | Screw diameter in mm | |
| 6 | Pitch in mm | |
| 7 | Stroke length in mm | |
| 8 | Head | GK = Rod end II = Head plate IV = Clevis |
| 9 | Shaft drive | 01 = Both sides 02 = Left side 03 = Right side |
| 10 | Accessories | 01 = Mechanical limit switch 02 = Swivel plate 03 = Inductive limit switch 04 = Anti-turn device |

