


## Grade 8 Clevis Shortening Clutch – G8CSC

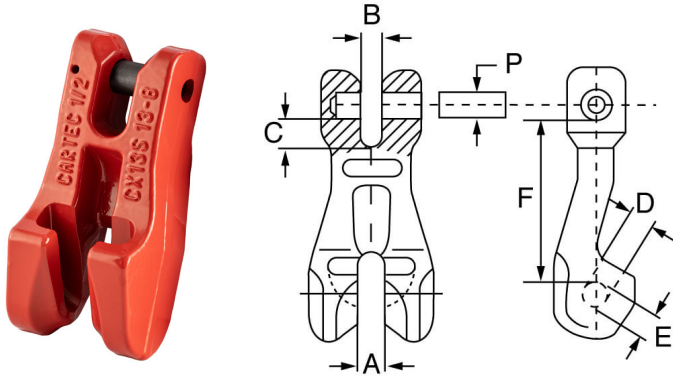

## CARTEC

- Alloy steel, quenched and tempered.
- Red painted finish.
- Conforms to BS EN 1677-1.
- Temperature range: -40 °C to +400 °C (Reductions in W.L.L apply).
- Clevis fitting enables direct connection to chain.
- For correct safe use of the clutch as a shortening device, it must be assembled to the master link via 3 links of chain.
- The use of the Clevis Shortening Clutch will allow 100% of the chain sling capacity.
- Certification available **2.1** **3.1** **DoC**

Product Code	Chain Dia mm	Part No.	A/B mm	C mm	D mm	E mm	F mm	P mm
G8CSC8	8	CX08	9.5	10	9.5	23.5	56	10
G8CSC10	10	CX10	12.5	14	12	25	88	13
G8CSC13	13	CX13	16.5	17	15	32.5	115	16

Product Code	Chain Dia mm	Part No.	A/B mm	C mm	D mm	E mm	F mm	P mm
G8CSC16	16	CX16	20.5	19	19	39	143	21

## Technical Data

Chain Dia mm	W.L.L. t	M.P.F. kN	M.B.F. kN	Weight kgs
8	2	50.3	80.4	0.4
10	3.15	78.5	126	0.94
13	5.3	133	212	1.92
16	8	201	322	3.16