


Grade 8 Eye Type Grab Hook – G8EGH

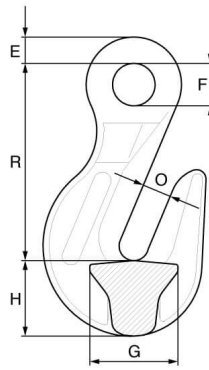

KITO
weissenfels

- Alloy steel, quenched and tempered.
- Red painted finish.
- Conforms to BS EN 1677-1.
- Temperature range: -40 °C to +400 °C (Reductions in W.L.L apply).
- Our grab hooks can be used as a shortening device without any reduction of SWL of the chain sling capacity.
- The 'T' shape in the bowl of the hook supports the chain and helps prevent possible deformation of the link when used as a shortening device.
- Certification available **2.1** **3.1** **DoC**

26/32mm size is Cartec brand

Product Code	Chain Dia mm	Part No.	E mm	F mm	G mm	H mm	O mm	R mm
G8EGH8	7/8	WA40	10	15.5	30	24	10	60
G8EGH10	10	WA41	12	20.5	44	32	13	80

Product Code	Chain Dia mm	Part No.	E mm	F mm	G mm	H mm	O mm	R mm
G8EGH13	13	WA42	16	25	53	38	17	104
G8EGH16	16	WA43	20	31	64	45	20	114
G8EGH20	20	WA44	24	36	85	53	23	135
G8EGH22	22	WA45	25	41	97	62	27	158
G8EGH26*	26	CD26	36	55	100	90	30.5	213
G8EGH32*	32	CD32	44	59	160	112	38.5	245

Technical Data

Chain Dia mm	W.L.L. t	M.P.F. kN	M.B.F. kN	Packing Qty	Weight kgs
7/8	2	50.3	80.4	40	0.3
10	3.15	78.5	126	16	0.6
13	5.3	133	212	10	1.3
16	8	201	322	8	2.2
20	12.5	314	503	1	4
22	15	380	608	1	5.8
26	21.2	520	832	1	13
32	31.5	772	1,240	1	30.5