


Grade 8 Eye Sling Hook c/w Safety Catch – G8ESH

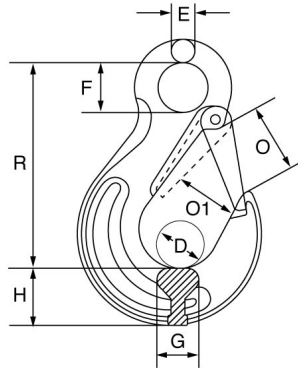

KITO
weissenfels

- Alloy steel, quenched and tempered.
- Red painted finish.
- Conforms to BS EN 1677-2.
- Temperature range: -40 °C to +400 °C (Reductions in W.L.L apply).
- Clevis fitting enables direct connection to chain.
- Certs available **2.1** **3.1** **DoC**

Product Code	Chain Dia mm	Part No.	D mm	E mm	F mm	G mm	H mm	O mm	O1 mm	R mm
G8ESH6	6	WA29S	18	10	20	16.5	21	25	19	84.5
G8ESH8	7/8	WA30S	24	11	25	19	27	32	25	106
G8ESH10	10	WA31S	30	16	34	26	33	40	31	131
G8ESH13	13	WA32S	38	19	43	33	42	48	39	164
G8ESH16	16	WA33S	44	25	50	40	50	55	45	182.5
G8ESH20	20	WA34S	53	27	55	48	54	61	54	205

Product Code	Chain Dia	Part No.	D	E	F	G	H	O	O1	R
	mm		mm	mm	mm	mm	mm	mm	mm	mm
G8ESH22	22	WA35S	60	30	60	50	61	71	61	225
G8ESH26	26	WA36S	72	36	70	60	69	84	73	265
G8ESH32	32	WA37S	80	39	76	71	89	95	87	259

Technical Data

Product Code	W.L.L.	M.P.F.	M.B.F.	Weight
	t	kN	kN	kgs
G8ESH6	1.12	28.3	45.2	0.24
G8ESH8	2	50.3	80.4	0.5
G8ESH10	3.15	78.5	126	0.9
G8ESH13	5.3	133	212	1.5
G8ESH16	8	201	322	2.75
G8ESH20	12.5	314	503	4.9
G8ESH22	15	380	608	8.8
G8ESH26	21.2	520	849	13.8
G8ESH32	31.5	772	1,240	27