


Grade 8 Master Link – G8ML

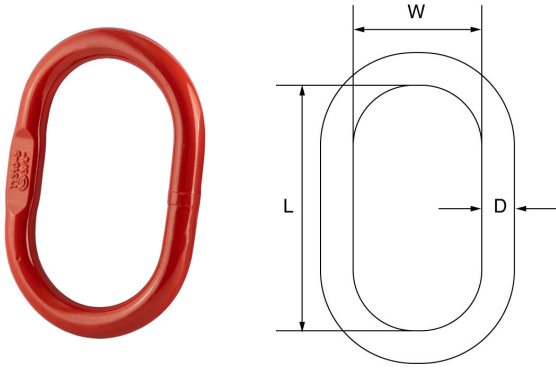

KITO
weissenfels

- Alloy steel, quenched and tempered.
- Red painted finish.
- Conforms to BS EN 1677-4.
- Temperature range -40 °C to +400 °C (Reductions in W.L.L apply).
- Suitable for use with grade 8 chains and wire/fibre rope slings.
- Designed for use with 1 or 2 leg slings.
- T ranges have large inside widths & lengths to allow for sling hardware and crane hooks.
- Certification available **2.1** **3.1** **DoC**

Product Code	Part No.	D	L	W	W.L.L.	M.P.F.	M.B.F.	Weight
		mm	mm	mm	t	kN	kN	kgs
G8ML87T	T87-8	15	120	70	2.75	67.4	108	0.5
G8ML108T	T108-8	16	140	80	3.55	87	139	0.67
G8ML1310T	T1310-8	20	160	95	5.5	135	216	1.21
G8ML1613T	T1613-8	27	190	110	9.45	232	371	2.65

Product Code	Part No.	D mm	L mm	W mm	W.L.L. t	M.P.F. kN	M.B.F. kN	Weight kgs
G8ML2016T	T2016-8	33	230	130	14.2	348	557	4.78
G8ML2220T	T2220-8	38	275	150	22.3	547	875	7.5
G8ML2622T	T2622-8	45	340	180	33.4	819	1,310	12.82
G8ML3226T	T3226-8	50	350	190	40.8	1,000	1,600	16.5
G8ML76W	W76-8	13	110	60	1.6	39.2	62.8	0.53
G8ML87W	W-87-8	16	110	60	2.12	52	83.2	0.53
G8ML108W	W-108-8	19	135	75	3.15	77.3	124	0.92
G8ML1310W	W-1310-8	23	160	90	5.3	130	208	1.6
G8ML1613W	W-1613-8	27	180	100	8	196	314	2.5
G8ML1816W	W-1816-8	33	200	110	11.2	275	439	4.2
G8ML2220W	W-2220-8	40	300	160	17	417	667	8.96