


## Grade 8 Short Link Chain – G8C

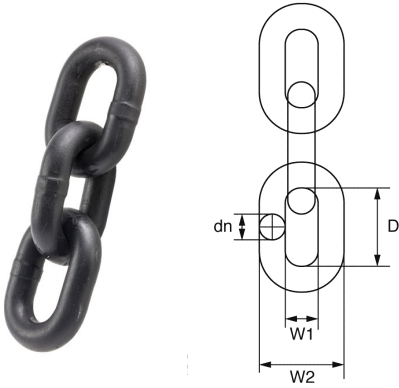

**KITO**  
weissenfels

- Alloy steel heat treated, quenched and tempered.
- Black painted finish.
- Conforms to BS EN 818-2.
- Temperature range: -40 °C to +400 °C (Reductions in W.L.L apply).
- Certification available **2.1** **3.1** **DoC**

Product Code	dn mm	D mm	W1 (min) mm	W2 (max) mm	W.L.L. t	M.P.F. kN	M.B.F. kN	Weight kgs/mtr
G8C7	7	21	9.1	25.9	1.5	38.5	61.6	1.17
G8C8	8	24	10.4	29.6	2	50.3	80.4	1.51
G8C10	10	30	13	37	3.15	78.5	126	2.23
G8C13	13	39	16.9	48.1	5.3	133	212	3.9
G8C16	16	48	20.8	59.2	8	201	322	5.79
G8C20	20	60	26	74	12.5	314	503	9.21
G8C22	22	66	28.6	81.4	15	380	608	11.2
G8C26	26	78	33.8	96.2	21.2	531	849	15.2
G8C32	32	96	41.6	118	31.5	804	1,290	23

