

WH SS-C4 QP Ultra Low Headroom Trolley Hoist

Standards: ASME B30.20 Chapter 6 Clamps and EN13157:2004 + A1:2009

Proof Tested: 1.5 x WLL.


Safety factor: 4:1.

Temperature range: -40°C to +120°C.

End stops: Fitted as standard.

Surface finish: Marine paint corrosion protected to International Standard ISO12944 - Category C5.

Handling: Grade 8 lifting points fitted on each corner of the Ultra Low Headroom Hoist (ULHT) to aid with manual handling.

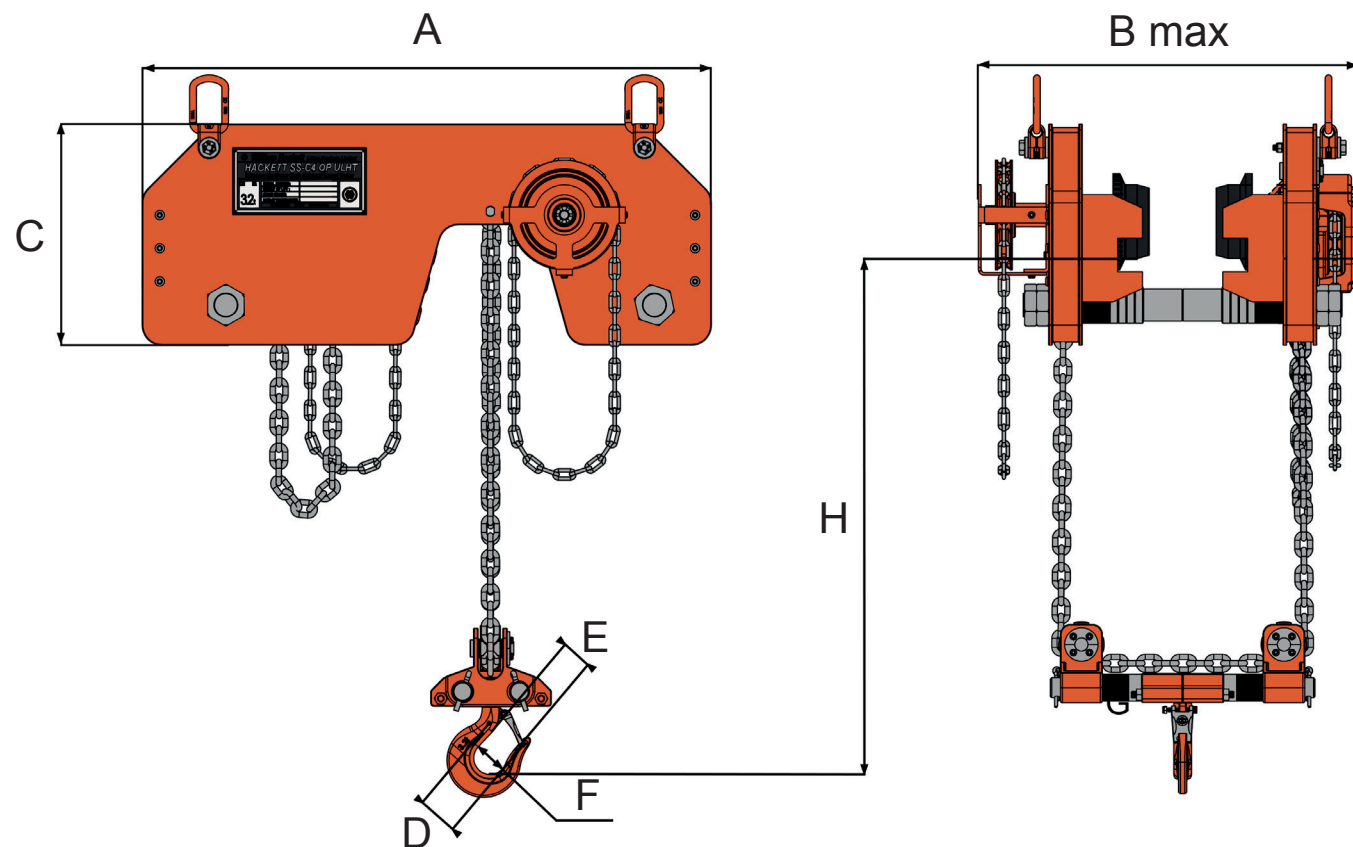

Metric Specifications

PART CODE	WLL tonnes	A mm	B max mm	C mm	D mm	E mm	F mm	BEAM RANGE mm
068.100	1.0	680	507	270	49.0	25.5	40	62 - 185
068.200	2.0	720	554	290	54.5	30.0	44	75 - 220
068.320	3.2	830	590	330	61.0	37.5	48	110 - 220
068.500	5.0	980	745	385	85.0	43.0	60	125 - 320
068.750	7.5	1180	765	440	89.0	53.0	83	145 - 320
068/1000	10.0	1180	765	440	89.0	53.0	83	145 - 320
068/1200*	12.0	1180	765	440	-	53.0	108	145 - 320
068/1500*	15.0	1540	765	440	-	80.0	108	145 - 320
068/2000*	20.0	1940	765	440	-	80.0	108	145 - 320

	1t	2t	3.2t	5t	7.5t	10t	12t	15t	20t
Minimum Headroom (H) mm	180	180	240	290	345	345	445	445	530
Nett Weight HOL 3m kg	65	98	129	213	365	365	376	495	588
Weight per 1m Additional HOL kg	3.4	3.4	4.6	6.1	10.5	10.5	10.5	14.8	19.2

* ULHT hoists over 12t are not held in stock and are manufactured upon request.

Delivery of ULHT hoists over 12t: Approximate lead time would be 3-4 months. The lead time would be re-confirmed upon receipt of a confirmation.

Dimension and unit weight for the ULHT hoists over 12t may be subject to change and will be confirmed against an order confirmation.

liftingsales@williamhackett.co.uk

www.williamhackett.co.uk

+44 (0)1665 604200

WH SS-C4 QP Ultra Low Headroom Trolley Hoist

Standards: ASME B30.20 Chapter 6 Clamps and EN13157:2004 + A1:2009

Proof Tested: 1.5 x WLL.


Safety factor: 4:1.

Temperature range: -40°C to +120°C.

End stops: Fitted as standard.

Surface finish: Marine paint corrosion protected to International Standard ISO12944 - Category C5.

Handling: Grade 8 lifting points fitted on each corner of the Ultra Low Headroom Hoist (ULHT) to aid with manual handling.

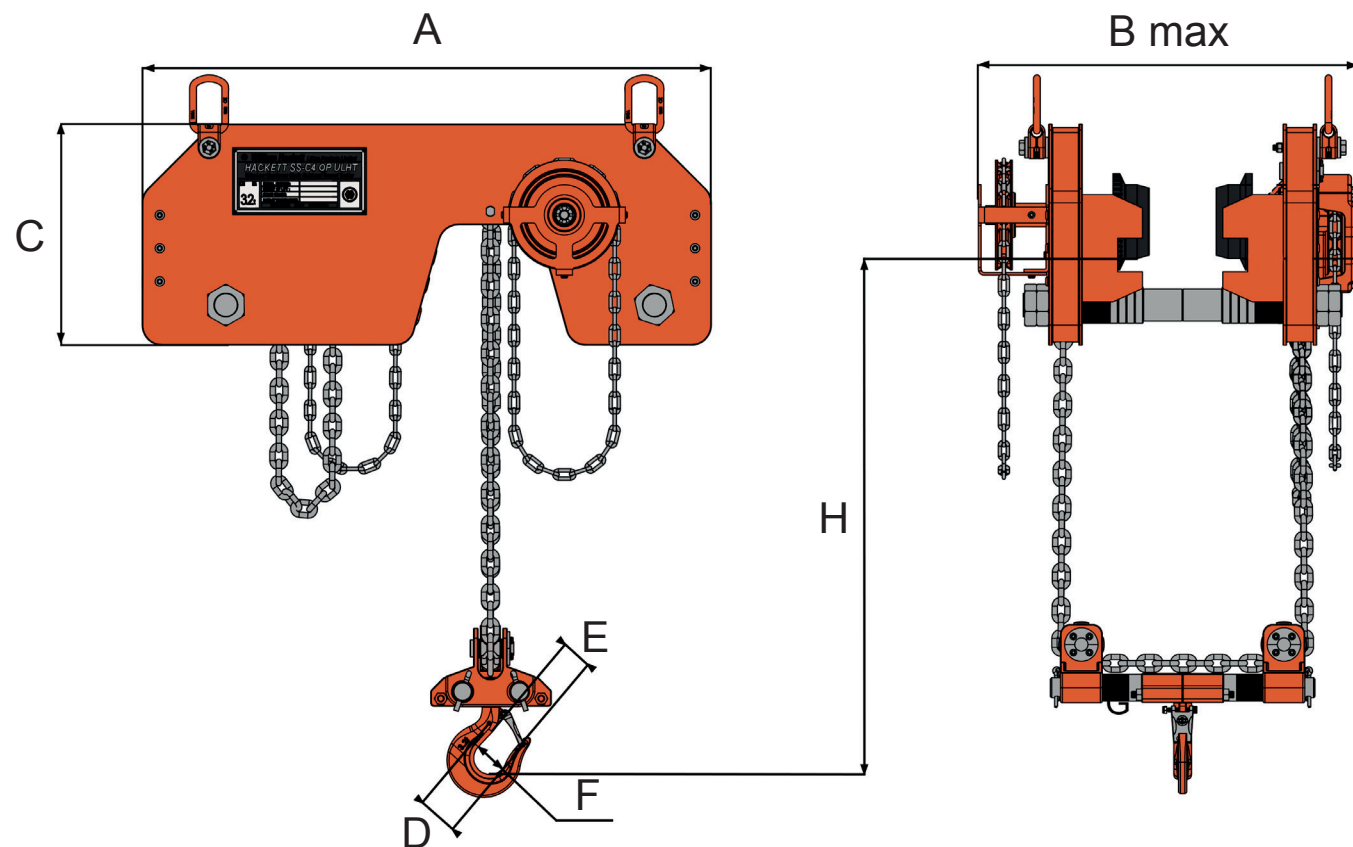

Imperial Specifications

PART CODE	WLL tons	A inch	B max inch	C inch	D inch	E inch	F inch	BEAM RANGE inch
068.100	1.0	26.77	19.96	10.63	1.93	1.00	1.57	2.44 - 7.28
068.200	2.0	28.35	21.81	11.42	2.15	1.18	1.73	2.95 - 8.66
068.320	3.2	32.68	23.23	12.99	2.40	1.48	1.89	4.33 - 8.66
068.500	5.0	38.58	29.33	15.16	3.35	1.69	2.36	4.92 - 12.60
068.750	7.5	46.46	30.12	17.32	3.50	2.09	3.27	5.71 - 12.60
068/1000	10.0	46.46	30.12	17.32	3.50	2.09	3.27	5.71 - 12.60
068/1200*	12.0	46.46	30.12	17.32	-	2.09	4.25	5.71 - 12.60
068/1500*	15.0	60.63	30.12	17.32	-	3.15	4.25	5.71 - 12.60
068/2000*	20.0	76.38	30.12	17.32	-	3.15	4.25	5.71 - 12.60

	1t	2t	3.2t	5t	7.5t	10t	12t	15t	20t
Minimum Headroom (H) inch	7.09	7.09	9.45	11.42	13.58	13.58	17.52	17.52	20.87
Nett Weight HOL 10ft lbs	143	216	284	470	805	805	829	1091	1296
Weight per Additional 3ft HOL lbs	7.5	7.5	10.1	13.4	23.1	23.1	23.1	32.6	42.3

* ULHT hoists over 12t are not held in stock and are manufactured upon request.

Delivery of ULHT hoists over 12t: Approximate lead time would be 3-4 months. The lead time would be re-confirmed upon receipt of a confirmation.

Dimension and unit weight for the ULHT hoists over 12t may be subject to change and will be confirmed against an order confirmation.

liftingsales@williamhackett.co.uk

www.williamhackett.co.uk

+44 (0)1665 604200