


PRIMA

INDUSTRIAL COMBINATION LADDER



*GRP/Fibreglass version available

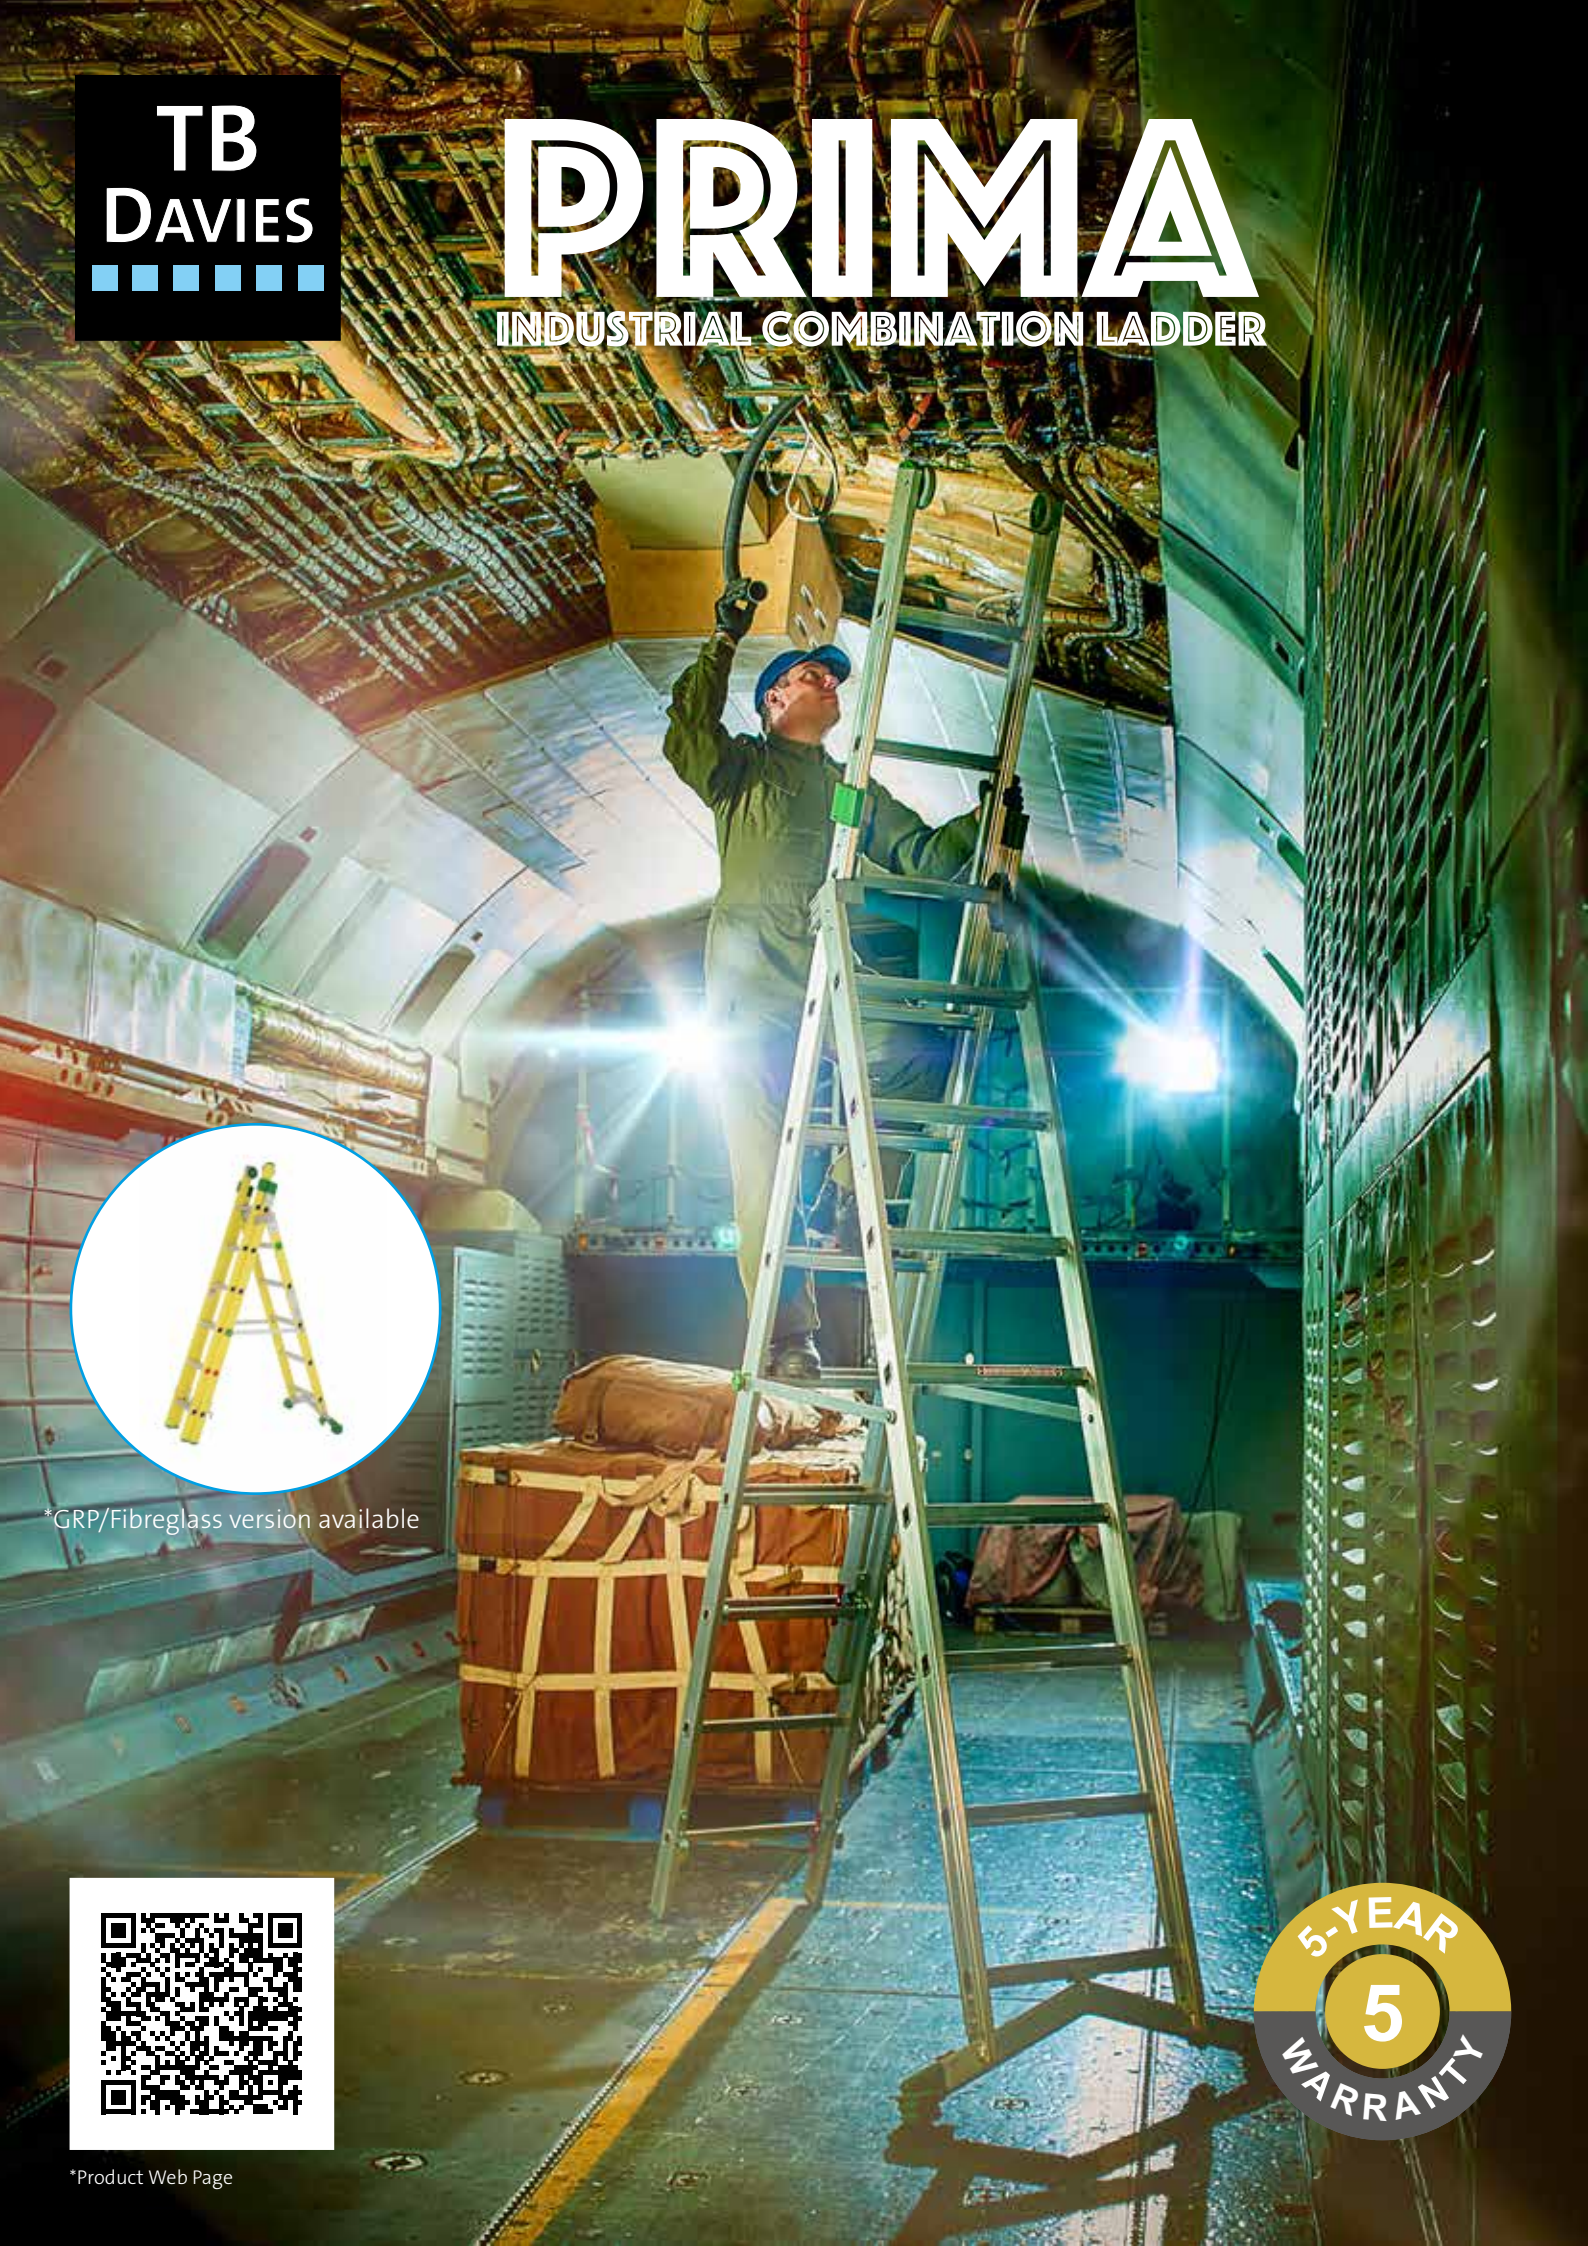

*Product Web Page





Telescopic stabiliser for use on uneven ground



Integrated wall wheels to assist in placement



Large box section stiles with twist-proof rung connections



Extended A-frame step ladder



Extended stairwell ladder



3-Section extension ladder

***Also available in GRP/Fibreglass**

SKU	RUNGS	CLOSED LENGTH (M)	APPROX WORKING HEIGHT ¹ (M)	EXTENDED LENGTH (M)	MAX TREAD HEIGHT A-FRAME (M)	OVERALL WIDTH (MM)	OPEN DEPTH (M)	WEIGHT (KG)
1300-051	5+6+6	2	4.5	4.2	1.9	830-1280	1.3	16
1300-053	7+8+8	2.6	6	5.7	2.5	830-1280	1.6	20.5
1300-054	8+9+9	2.9	6.6	6.3	2.8	830-1280	1.8	25
1300-056	10+11+11	3.5	8.4	8.1	3.4	830-1280	2.3	29.5

¹ Working height is calculated as 1,600mm plus platform height or last climbing tread, whichever is appropriate. Ladders set at an angle of 75° degrees.