




Viper Vertical Plate Lifting Clamp VVPC – CD Type

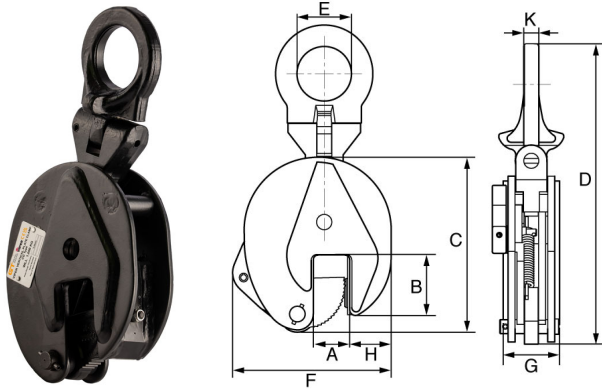

- Specially hardened steel is used in both the serrated jaws.
- Matt black finish.
- Meets the W.L.L. performance requirements of BS EN 13155.
- Minimum breaking load is 4 times the W.L.L.
- The steel plate lifted should be under the HRC 37 (HB 345).
- Lifting under 20% of the rated capacity loading is strictly forbidden.
- The GT Viper plate clamp is designed to lift one plate at a time.
- Marked in accordance with BS EN 13155.
- Certification available **2.1** **DoC**

Product Code	Part No.	Capacity	Jaw Opening	A	B	C	D	E	F	G	H	K	Weight
		kgs	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs

Product Code	Part No.	Capacity kgs	Jaw Opening mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	K mm	Weight kgs
VVPC0.5	CD0.5T	500	0 - 15	25	37	128	212	30	98	40	29	10	2
VVPC1	CD1T	1,000	0 - 20	33	63	170	295	48	145	54	42	12	5
VVPC2	CD2T	2,000	0 - 25	35	76	205	370	68	175	56	54	18	8
VVPC3	CD3T	3,000	0 - 25	45	83	237	418	76	215	78	59	20	15
VVPC5	CD5T	5,000	0 - 50	55	90	262	480	76	232	90	59	20	23
VVPC8	CD8T	8,000	0 - 45	45	112	330	600	85	263	100	77	22	37
VVPC12	CD12T	12,000	50 - 90	90	145	380	700	90	390	113	100	25	50
VVPC16	CD16T	16,000	60 - 100	100	155	410	712	100	425	113	110	30	65