




Viper Wire Rope Winch – VWRW

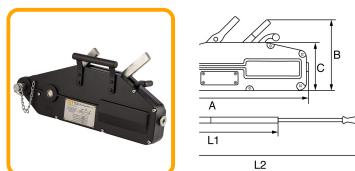

- Portable unit for pulling, lifting, lowering and securing loads.
- Black painted finish.
- Meets the W.L.L. performance requirements of BS EN 13157.
- Minimum breaking load is 4 times the W.L.L. based on the lifting capacity.
- All machines are supplied complete with an extendable operating handle.
- Only the GT specially manufactured wire rope will ensure correct functioning.
- Overload protection ensures high personal safety when in operation.

● Marked in accordance with BS EN 13157.

● Certs available [2.1](#) [DoC](#)

Product Code	Lifting Capacity	Pulling Capacity	Rope Dia	A	B	C	D	E	L1	L2	Weight
	kgs	kgs	mm	mm	mm	mm	mm	mm	mm	mm	kgs
VWRW0.8	800	1,250	8.3	426	235	168	60	64	-	800	6
VWRW1.6	1,600	2,500	11	545	280	190	72	97	800	1200	11
VWRW3.2	3,200	5,000	16	660	325	230	91	116	800	1200	22
VWRW5.4	5,400	8,400	20	932	420	300	155	152	800	1350	57