


## Cobra Plus Grade 10 Master Link – 1011

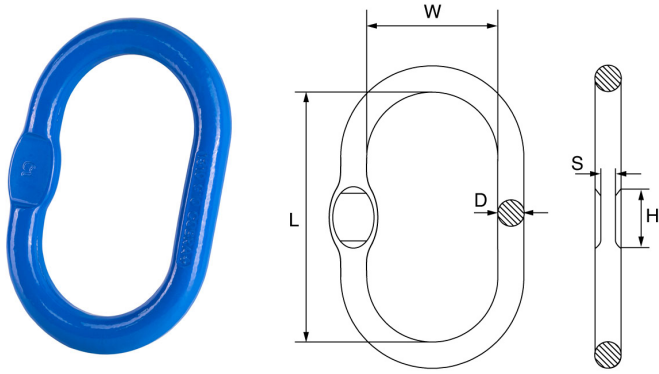

- Grade 10 alloy steel, quenched and tempered.
- Blue painted finish.
- Meets W.L.L. perf. req. of BS EN 1677-4 +25% of loads.
- Temp. Range -20°C up to +200°C.
- M.B.L. equals 4 x W.L.L.
- Marked with Cobra+, material grade, chain size and traceability code.
- Certs available **2.1** **DoC**

Product Code	W.L.L. t	M.P.L. t	M.B.L. t	D mm	L mm	W mm	S x H mm	Weight kgs
G100ML76	2.3	4.75	9.2	13	110	60	7x25	0.34
G100ML87	3.5	6.25	14	16	110	60	7x28	0.53
G100ML108	5	10	20	18	135	75	8x30	0.86
G100ML1310	7.6	16.75	30.4	22	160	90	11x43	1.6

Product Code	W.L.L. t	M.P.L. t	M.B.L. t	D mm	L mm	W mm	S x H mm	Weight kgs
G100ML1613	10	25	40	27	180	100	13x43	2.46
G100ML1916	14	35	56	33	200	110	17x55	4.14
G100ML2219	25.1	47.5	100.4	36	260	140	19x60	6.22
G100ML2622	30.8	66.25	123.2	45	340	180	-	12.85
G100ML3222	40	98.25	160	50	350	190	-	16.55
G100ML0032	60	120	240	60	400	200	-	27