


Grade 10 Integrated Eye Grab Hook – GIE Series

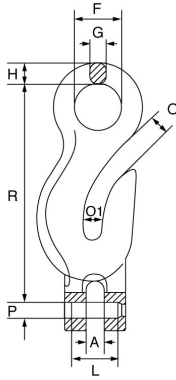

KITO
weissenfels

- Grade 10 alloy steel, quenched and tempered.
- Grey painted finish.
- Meets the performance requirements of BS EN 1677-4 +25% of loads.
- No W.L.L reduction when used as a lifting or shortening in a grade 10 sling in accordance with performance requirement – BS EN 1677-7.
- Marked with material grade, manufacturers ID, size, product ID mark and traceability code.
- Certification available **2.1** **DoC**

Product Code	Part No.	Chain Dia	A	F	G	H	O	O1	R	P x L
		mm	mm	mm	mm	mm	mm	mm	mm	mm
G10IEGH6	GIE6	6	6.5	18	7.7	10.3	8	8	88.5	7.4 x 16.5
G10IEGH8	GIE7-8	7/8	9.1	24	9.6	13.5	9.2	9	117	9.6 x 23
G10IEGH10	GIE10	10	11.5	31	12	16	13.7	13.5	148	12.5 x 29.5
G10IEGH13	GIE13	13	14.5	37	15.5	20	16.2	15.5	185	16 x 37
G10IEGH16	GIE16	16	17.5	48	20.5	26.5	21.4	20	232	20 x 52

Technical Data

Chain Dia mm	W.L.L. t	M.P.F. kN	M.B.F. kN	Weight kgs
6	1.4	35.3	56.5	0.27
7/8	2.5	62.8	100	0.61
10	4	98.2	157	1.22
13	6.7	166	265	2.55
16	10	251	402	4.9