




## Grade 10 Quad Master Link Assembly – DCR4 Series – G10DCR4

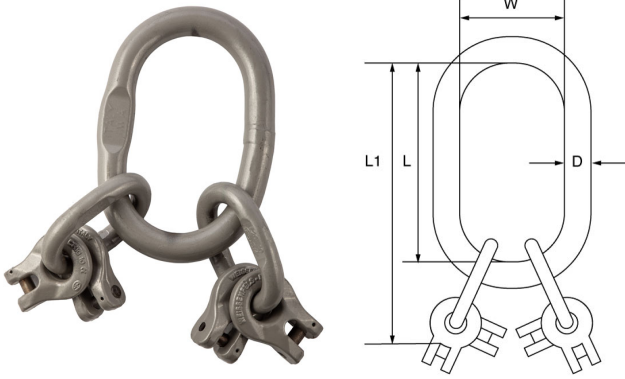

**KITO**  
weissenfels

- Grade 10 alloy steel, quenched and tempered.
- Grey painted finish.
- Meets the performance requirements of BS EN 1677-4 +25% of loads.
- Suitable for use with grade 10 chains and wire/fibre rope slings.
- Marked with material grade, manufacturers ID, size, product ID mark and traceability code.
- Certification available **2.1** **DoC**

Product Code	Part No.	Chain Dia	W.L.L.	M.P.F.	M.B.F.	D	L	L1	W	Weight
		mm	t	kN	kN	mm	mm	mm	mm	kgs / ea
G10DCR46	D18L13CR	6	3	73.6	118	19	135	225	75	1.7
G10DCR48	D22L16CR	7/8	5.3	130	208	23	160	272	90	3.3
G10DCR410	D26L20CR	10	8.4	206	330	27	180	314	100	5.5
G10DCR413	D32L22CR	13	14	343	549	33	200	378	110	9.9
G10DCR416	D36L26CR	16	21.2	520	832	36	260	475	140	16.4
G10DCR420	D50L32CR	19/20	33.6	824	1,318	50	350	595	190	34.7
G10DCR422	D50L36CR	22	40	981	1,569	50	350	622	190	39.9

