


## Closed Body Rigging Screw Jaw/Jaw – RSJJ

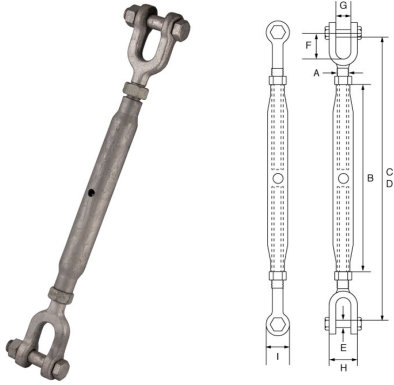

- Mild steel.
- 6-8mm electro galvanised finish.
- 10mm and above hot dipped galvanised finish.
- Proof load tested to 2 times the W.L.L.
- Minimum breaking load is 5 times the W.L.L.
- Metric Threads.
- Marked with CE, UKCA, W.L.L, manufacturers ID and traceability code.
- Certs available **2.1** **DoC**

| Product Code | W.L.L.<br>t | A<br>mm | B<br>mm | C - Closed<br>mm | D - Open<br>mm | E<br>mm | F<br>mm | G<br>mm | H<br>mm | I<br>mm | Weight<br>kgs |
|--------------|-------------|---------|---------|------------------|----------------|---------|---------|---------|---------|---------|---------------|
| RSJJ6        | 0.2         | 6       | 100     | 175              | 255            | 5       | 19      | 7       | 20      | 13      | 0.146         |
| RSJJ8        | 0.32        | 8       | 108     | 199              | 282            | 6       | 25      | 9       | 24      | 14      | 0.26          |
| RSJJ10       | 0.5         | 10      | 125     | 222              | 320            | 8       | 26      | 10.5    | 28      | 19      | 0.42          |

| Product Code | W.L.L.<br>t | A<br>mm | B<br>mm | C - Closed<br>mm | D - Open<br>mm | E<br>mm | F<br>mm | G<br>mm | H<br>mm | I<br>mm | Weight<br>kgs |
|--------------|-------------|---------|---------|------------------|----------------|---------|---------|---------|---------|---------|---------------|
| RSJJ12       | 0.7         | 12      | 195     | 320              | 479            | 10      | 32      | 13      | 33      | 22      | 0.81          |
| RSJJ16       | 1.2         | 16      | 230     | 388              | 572            | 12      | 39      | 18      | 42      | 28      | 1.44          |
| RSJJ20       | 1.5         | 20      | 270     | 454              | 672            | 16      | 46      | 20      | 51      | 33      | 2.28          |
| RSJJ22       | 2.2         | 22      | 295     | 490              | 730            | 20      | 55      | 25      | 55      | 38      | 3.23          |
| RSJJ24       | 3.2         | 24      | 325     | 558              | 819            | 22      | 63      | 30      | 70      | 46      | 4.34          |
| RSJJ33       | 4.8         | 33      | 370     | 681              | 977            | 30      | 85      | 38      | 82      | 60      | 9.56          |
| RSJJ39       | 6           | 39      | 400     | 710              | 1017           | 33      | 86      | 45      | 85      | 76      | 11.12         |
| RSJJ45       | 8.5         | 45      | 400     | 760              | 1050           | 39      | 105     | 50      | 100     | 86      | 16.4          |
| RSJJ48       | 11          | 48      | 400     | 820              | 1110           | 45      | 120     | 58      | 118     | 92      | 24            |