


Grade 80 GT Cobra Swivel Lifting Eyebolt with Ring – G80SLP

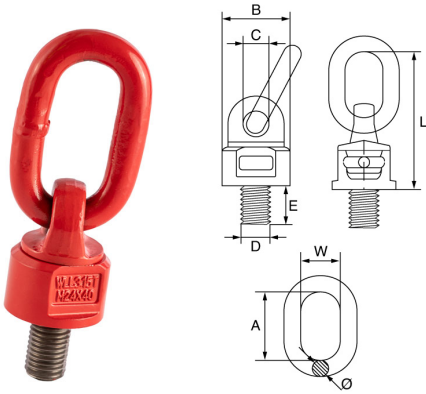

COBRA
GRADE 80 CHAIN & FITTINGS

- Alloy steel, quenched and tempered.
- Red painted finish.
- Minimum breaking load is 4 times the W.L.L.
- Marked with CE, W.L.L, material grade, manufacturers ID and size.
- Not suitable for rotation under load.
- Certs available **2.1** **DoC**

Product Code	Part No.	W.L.L	W.L.L	D x E	A	B	C	L	Ø	W	Torque	Weight
		0°	90°								Nm	kgs
		t	t	mm	mm	mm	mm	mm	mm	mm		
G80SLP818	SLR303-M8	0.6	0.3	M8 x 18	55	36	16.5	97	14	30	10-15	0.45
G80SLP1018	SLR303-M10	1	0.5	M10 x 18	55	36	16.5	97	14	30	10-15	0.45
G80SLP1090	SLR303-M10x90	1	0.5	M10 x 90	55	36	16.5	97	14	30	10-15	0.5
G80SLP1218	SLR303-M12	1	0.5	M12 x 18	55	36	16.5	97	14	30	10-15	0.46

Product Code	Part No.	W.L.L 0° t	W.L.L 90° t	D x E mm	A mm	B mm	C mm	L mm	Ø mm	W mm	Torque Nm	Weight kgs
G80SLP12110	SLR303-M12x110	1	0.5	M12 x 110	55	36	16.5	97	14	30	10-15	0.54
G80SLP1620	SLR303-M16	2.24	1.12	M16 x 20	55	36	16.5	97	14	30	20-30	0.47
G80SLP16120	SLR303-M16x120	2.24	1.12	M16 x 120	55	36	16.5	97	14	30	20-30	0.63
G80SLP2030	SLR303-M20	4	2	M20 x 30	70	49.5	19	125	16	35	50-70	0.99
G80SLP20120	SLR303-M20x120	4	2	M20 x 120	70	49.5	19	125	16	35	50-70	1.12
G80SLP2440	SLR303-M24	6.3	3.15	M24 x 40	85	57	22	150	18	40	130-160	1.36
G80SLP24120	SLR303-M24x120	6.3	3.15	M24 x 120	85	57	22	150	18	40	130-160	1.65
G80SLP3035	SLR303-M30	10.6	5.3	M30 x 35	85	66	23.5	166	22	40	200-250	2.36
G80SLP30120	SLR303-M30x120	10.6	5.3	M30 x 120	85	66	23.5	166	22	40	200-250	2.77
G80SLP3650	SLR303-M36	12.8	8	M36 x 50	115	80	27	203	22	50	280-400	3.88
G80SLP36140	SLR303-M36x140	12.8	8	M36 x 140	115	80	27	203	22	50	280-400	4.6
G80SLP4260	SLR303-M42	16	10	M42 x 60	115	80	27	203	25	50	500-600	4.56
G80SLP42160	SLR303-M42x160	16	10	M42 x 160	115	80	27	203	25	50	500-600	5.65
G80SLP4560	SLR303-M45	16	10	M45 x 60	115	80	27	203	25	50	500-600	4.7
G80SLP4872	SLR303-M48	16	10	M48 x 72	115	80	27	203	25	50	500-650	4.9
G80SLP48160	SLR303-M48x160	16	10	M48 x 160	115	80	27	203	25	50	500-650	6.18
G80SLP5684	SLR303-M56	24	15	M56 x 84	152	117	42	280	32	70	600-900	11.8
G80SLP6495	SLR303-M64	24	15	M64 x 95	152	117	42	280	32	70	600-900	12.5