




## Grade 10 2 Leg Master Link – DG2 Series – G10DG2

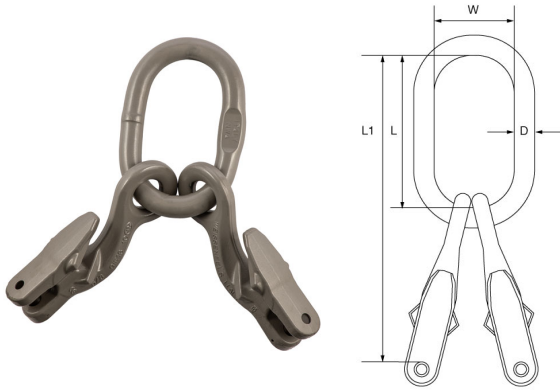

**KITO**  
weissenfels

- Grade 10 alloy steel, quenched and tempered.
- Grey painted finish.
- Meets the performance requirements of BS EN 1677-4 +25% of loads.
- Suitable for use with grade 10 chains and wire/fibre rope slings.
- Specially designed for direct clevis connection of hooks to chain.
- No reduction in W.L.L. of sling when using the shortening hook.
- Marked with material grade, manufacturers ID, size, product ID mark and traceability code.
- Certification available **2.1** **DoC**

Product Code	Part No	Chain Dia 2 leg	W.L.L.	M.P.F.	M.B.F.	D	L	L1	W	Weight
		mm	t	kN	kN	mm	mm	mm	mm	kgs
G10DG26	D13GI2	6	2	49	78.5	13	110	198	60	0.88
G10DG28	D18GI2	7/8	3.55	87	139	19	135	252	75	2.15
G10DG210	D22GI2	10	5.6	137	220	23	160	308	90	4
G10DG213	D26GI2	13	9.5	233	373	27	180	365	100	7.64

Product Code	Part No	Chain Dia 2 leg	W.L.L.	M.P.F.	M.B.F.	D	L	L1	W	Weight
		mm	t	kN	kN	mm	mm	mm	mm	kgs
G10DG216	D32GI2	16	14	343	549	33	200	432	110	13.1